

Automated Design of Multi-Layered Web Information Systems

Fábio Paulo Basso, Raquel Mainardi Pillat, Toacy Cavalcante Oliveira

*Federal University of Rio de Janeiro (UFRJ) - COPPE
Rio de Janeiro, RJ - Brazil +55 21 2562-8672*

{fabiopbasso, rmpillat, toacy}@cos.ufrj.br

Fabricia Roos-Frantz, Rafael Z. Frantz

*UNIJUÍ University, Department of Exact Sciences and Engineering
Ijuí, RS, Brazil*

{frfrantz, rzfrantz}@unijui.edu.br

Abstract

In the development of web information systems, design tasks are commonly used in approaches for Model-Driven Web Engineering (MDWE) to represent models. To generate fully implemented prototypes, these models require a rich representation of the semantics for actions (e.g., database persistence operations). In the development of some use case scenarios for the multi-layered development of web information systems, these design tasks may consume weeks of work even for experienced designers. The literature pointed out that the impossibility for executing a software project with short iterations hampers the adoption of some approaches for design in some contexts, such as start-up companies. A possible solution to introduce design tasks in short iterations is the use of automated design techniques, which assist the production of models by means of transformation tasks and refinements. This article details our methodology for MDWE, which is supported by automated design techniques strictly associated with use case patterns of type CRUD. The novelty relies on iterations that are possible for execution with short time-scales. This is a benefit from automated design techniques not observed in MDWE approaches based on manual design tasks. We also report on previous experiences and address open questions relevant for the theory and practice of MDWE.

Keywords: Model-Driven Web Engineering, Rapid Application Prototype, Domain-Specific Language, Prototyping, Automated Design, Mockup, Experience Report.

1. Introduction

Model-Driven Engineering (MDE) [1] is a paradigm for model-based software development implemented by several techniques and used in several industrial contexts. In typical MDE-based processes, model transformations should receive a highly detailed model to generate working pieces of applications [2]. To generate full source code, several parts of an application design are detailed in Domain-Specific Languages (DSLs) [3] and/or decorated with annotations added to model elements represented with the Unified Modelling Language (UML) [4], a general-purpose modelling language commonly used. In any case, this makes the software construction dependent of design tasks.

In the development of web information systems, web front ends such as layout composed of Graphic User Interface (GUI) components [5] and behavioural diagrams [6] are usually represented. To allow the generation of full source code with an approach for Model-Driven Web Engineering (MDWE) [7], these models are manually decorated with semantics for the actions of users, screen flows and business logic. It is possible to abstract implementation

details using a design language, focusing on the specification of semantics in models that formalize the knowledge about software requirements [8]. Before the source code generation, these models can be further refined by designers, enabling clients to experiment an executable prototype in the end. This approach is known as *multi-view* [8], and the model is created and enriched taking as input high-level abstractions of other models that map implementation details through model transformations.

The execution of a multi-view approach for MDWE may use design tasks that require months of work [9, 10]. Depending on the size of the software project and the adopted schedule in software process iterations, the effort invested in detailing models is seen as a reason to avoid the adoption of some of MDWE approaches [11]. Therefore, the ability to execute these tasks in short time-scales is a desirable feature in some contexts, such as in start-up companies [12, 13].

A possible solution to speed-up the modelling phase, thus helping in the execution of iterations in short time-scales, is the use of techniques for automated design [14, 15]. In this article, we suggest the use of three different

phases for constructing models for MDWE, namely: evolutionary, architectural, and functional. Models are based on the Model-View-Controller (MVC) architectural pattern [16]. Although each prototyping phase is handled by some DSL and tools found in the literature, their integrated use is still a challenge in MDWE.

We present a methodology for MDWE named Mockup-ToME Method, which includes tasks supported by (semi-)automated design techniques for some use case patterns [17]. We extend previous contributions [18], by detailing tasks and artefacts that include many DSLs, developed to support the design of many layers of MVC-based application models, and the tools associated with these tasks for automated design. We also summarized data collected from two software projects, the first considering mostly manual design tasks and the second considering the use of tasks based on automated design techniques.

A partially assisted design through Wizards was used in the first software project, with iterations planned for one month or more. In the second project, we used Mockup-ToME Method with iterations planned and executed with one to two weeks. Both approaches are based on use case patterns of type CRUD [19], and use the same DSLs for representation of MVC-based application models, which are used in the end of a lifecycle for model transformations by the same source code generators. Differently, Mockup-ToME Method includes DSLs and tools for designers to work in high-level of abstraction than in MVC-based application models.

The use of short iterations is a benefit observed in MockupToME Method, but not in our previous approach, i.e., in manual design of these models. The reasons why short time-scales are feasible in MockupToME Method has to do with the automated design techniques discussed in this article. Thus, we also derived interesting research questions as a result from these two software projects.

The rest of the article is organized as follows: Section 2, conceptualizes this work and Section 3 motivates this research; Section 4 exemplifies the representation of preliminary requirements, which are the input for the automated design approach introduced in Section 5; Section 6, describes the methodology, which is complemented in Section 7 with implementation details and in Section 8 with activities performed after the source code generation; Section 9, summarizes the two software projects, with lessons and insights for future research; Section 10, points out limitations; Section 11 presents the related work; and, finally, Section 12, reports on our main conclusions and possible future work.

2. Concepts

In the context of the development of web information systems, the following concepts are important for the understanding of this article [16, 19, 20]:

- **Model-View-Controller (MVC).** Is an architectural pattern [21] frequently used in the construction of web information systems [22]. This pattern is important to modularize and structure the source code in three layers, thus facilitating the maintenance [23] and avoiding the erosion of architectures as they evolves over time.
- **Conceptual model.** A class diagram composed of analysis classes, also named entities, which represents the *Model* layer of the MVC [16].
- **GUI Templates.** Facilitate the development of standardized structures for GUI [24] allowing developers to focus on the logic layer, while layout details and actions are managed by a template engine. By means of templates, developers focus on the content that is placed inside a template structure.
- **CRUD.** A type of GUI template and an acronym for *create, read, update, and delete* [19] characterising frequent set of use cases developed in information systems that allow to persist, retrieve and remove objects to/from a database. Different structures for CRUD can be used, and may include a specific GUI template.
- **Domain-Driven Design (DDD).** The *Model* layer is used to represent all the other application layers using a DDD approach [16]. In MDWE, DDD drives the generation of a detailed MVC-based model, guiding the refinement of multiple layers associated with a particular use case scenario and a paper prototype.
- **Master/Detail.** A well-known concept among software developers, which allows the classification of use cases for *use case patterns* [17]. These concepts of Master and Detail are well discussed in approaches for DDD [16] and the object oriented method [17].

The following concepts are important to contextualize our work:

- **Use case scenario.** Is one of possible flows from a use case [25] or user story [26]. Use case scenarios are important both for design and for tests with clients [25], which evaluate models, prototypes and also the final version of an application piece with acceptance tests.
- **Paper prototype.** A hand drawing on a paper showing user interfaces with user interactions that represents use case scenarios [25]. It is a software artefact represented in a high-level of abstraction than a mockup. A paper prototype is not a model, but a document usually associated with user stories specified in initial brainstorming meetings for the requirements elicitation. It is also called as pre-prototype [27] and, sometimes, as throwaway prototype [25].

- **Mockup.** A model for a GUI, which is not possible to be fully implemented in functional prototypes [28, 12, 29]. In our understanding, mockups are abstractions in a high-level than the business logic needed in the development of web information systems, focusing on GUI components specification. Mockups may also be called sketches [30].
- **Round-trip engineering.** A set of activities aiming at synchronize generated source code with manually developed code [31]. It is performed automatically with the support of tools or, sometimes, manually, when it is required to update the model based on changes from source code.
- **Full source code generation.** Is the ability to generate 100% of what is designed, not 100% of all the application [32]. Kelly and Tolvanen [32] claim that full source code generation is a possible solution that mitigates the execution of changes in generated artefacts.

The Java platform is important for the implementation of web information systems and is divided in J2EE, J2SE, and J2ME editions. Burke and Monson-Haefel [22] state that:

1. For the development of forms to desktop platforms, developers adopt J2SE and APIs such as AWT and Java Swing.
2. For the development of forms to mobile platforms, developers adopt J2ME and APIs for MIDP such as Connected Limited Device Configuration (CLDC) and Connected Device Configuration (CDC). The latter API focuses on devices that allow for rich GUI components and rich user interactions, whereas the former is quite limited. For this reason, CDC is supported by GUIs developed with the AWT, similarly as in J2SE edition.
3. For the development of forms on the web, developers adopt J2EE, which can include: a) tools for the database management system such as PostgreSQL; b) web frameworks such as Spring Framework and frameworks for Object Relational Mapping (ORM) such as Hibernate; and, c) APIs for the development of the *View* layer including JSP, JSTL, Dojotoolkit, jQuery, and so on.

Finally, some software projects may require all these editions in the development of multi-layered systems. This is the case of the systems that we have developed, which we discuss in the next sections.

3. Motivation and Context

We have been in an effort to introduce model-based solutions in start-up contexts in an initiative for “MDE as

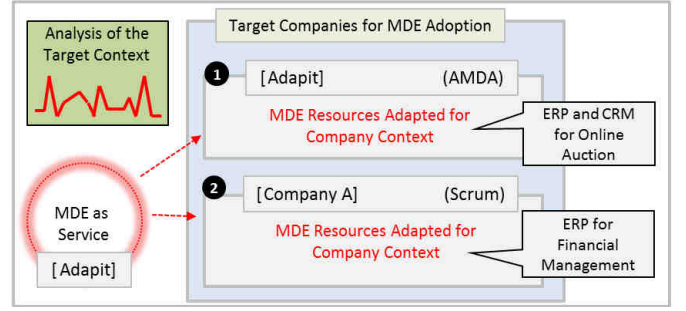


Figure 1: Implemented scenario for MDE as Service considering contexts from two software projects, one executed by Adapit and the other by Company A.

a Service”, as illustrated in Figure 1. In this scenario, resources developed for MDE (e.g., model transformations, DSLs and tools) are applied in different contexts. We have implemented MDE as a Service by means of company *Adapit*, founded in 2007 and supported for three years by a business incubator, hosted in one of the biggest scientific and technological parks in Brazil. Through *Adapit*, we have introduced resources for MDWE in five software projects, three out of them developed by teams from *Adapit* and two out of them by teams from other start-ups.

The motivation for the advent of a new methodology and tool support came in 2007, from the internal application of our first approach for MDWE. It is a software project for the development of an web information system for online auction, hired on demand by another start-up, i.e., by an auction agency. This project needed the execution of iterations lasting one month due to distances between these start-ups. This time-scale implied in validations with clients carried out too late and, consequently, requiring a considerable rework in model and source code due to changes in requirements. Following the instructions from the software engineering discipline [25], we concluded that with shorter time-scales we could obtain feedback from clients in an early stage. However, due to a sum of factors such as the time invested in manual representation of models, issues in source code generation and bad practices for manual coding, hampered the execution of shorter time-scales.

As a solution to surpass these issues, between 2008 and 2010 we planned and developed an approach for automated design. It includes a tool named *MockupToME* and other DSLs in a methodology named *MockupToME Method*. It is the result of three years of industrial innovation, incepted exclusively for the application of MDWE in target software projects for web information system. Moreover, this approach is limited to assist the design of models for use case patterns such as CRUD, List, Filter, and Report.

We observed that *MockupToME Method* speed-up the specification of detailed MVC-based models within iterations planned in short iterations. In 2010 we implemented a feasibility study for MDE as a Service, by introducing our new approach to other start-up, referred to in this

article as “Company A”. Differently from Adapit, Company A adopts Scrum [33] as the reference model for the software development process. Likewise, we adapted our resources for the target context [34], analysing issues associated with this specific reference model in combination with MDE [35, 36].

As illustrated in Figure 1, our approach for MDWE has been used with different frameworks for management of software processes: Scrum and AMDA [37]. The MockupToME Method is agnostic to the framework adopted by the target software project and can be introduced in any model for software development process. We also represented our methodology with the BPMN [38]. However, it is also agnostic to the BPMN representation. Thus, the reader can consider it as flexible for inclusion of other tasks.

We present a contribution for the theory and practice of MDWE, discussing elements from methodology and tool support that configures our best approach for two start-up contexts. Likewise, considering mostly the worst-case scenario for design, we present some elements that we consider essential and optional for application of design techniques, tasks for validation with clients and coding issues. In the end, we also summarized a report of two systems, one developed with the automated design proposal and the other using mostly manual design (some wizards), and discuss on open questions associated with the MockupToME Method.

4. Running Example

We illustrate our methodology considering the development of an e-commerce application, for the use case diagram shown in Figure 2. Two actors, **Customer** and **Manager**, can perform the following use cases: 1) **Maintain Account**, which allows users to persist their personal data, preferences for categories of products and associate credit cards; 2) **Maintain products**, which allows users to persist data associated with products (e.g., a category); 3) **List products by preferences**, which allows customers to list products based on their preferences for categories; 4) **Generate billet**, which allows customers to pay for products using banking billet/slip. In the next sections, we demonstrate the automated design of the use case **Maintain products**.

The use case **Maintain products**, adopted for exemplification, also includes the following use case scenarios: **Success Scenario**, 1) - **Find and Select a Category** - the category of a product is already available in the database, thus requiring the development of a complementary mockup to *Find* and to *Select* the category for inclusion in a product, or; **Alternative Scenarios**, 1.1) - **Create a Category** - the category was not found, it must be created, then the end-user re-execute the success scenario.

Although we focused on the exemplification of a form and filter for CRUD, it is also possible to automate the

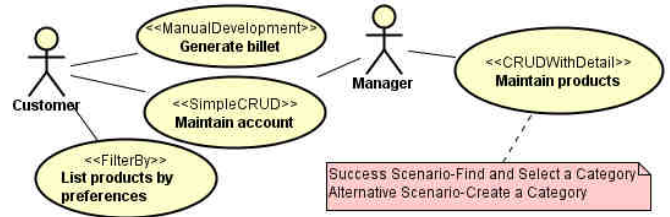


Figure 2: E-commerce use cases designed manually conforms to the CRUD UML Profile. This is a use case view that illustrates a functionality considered for implementation in a unique iteration of the software development process.

design of reports, lists, and other variations of user interactions with CRUD operations. Likewise, the unique use case that is not target for the presented techniques is the **Generate billet**, which requires manual development. The other use cases are possible to be automated similarly as the use case **Maintain products**. A reason for exemplification of **Maintain products** is its use case scenarios: besides the implementation of CRUD operations, the user can *Find* and *Select* the category for inclusion in a product.

Differently, the type of use case associated with **Generate billet** implies in the development of a scenario composed of the following implementations: 1) a mockup for list the products from a web shop kart; 2) a class to generate the PDF file. Due to limitations in our tool support to assist the design of **Generate billet**, the first implementation can be generated, but not the second one. Therefore, for didactic reasons, the reader should assume that **Generate billet** is manually developed, allowing us to exemplify the use of round-trip engineering.

5. Approach

Our MDWE approach is illustrated in Figure 3 and includes the design of mockups with the MockupToME DSL¹. A screenshot of MockupToME metamodel is shown in Figure 4 (A). Models in conformity with such DSL are refined and transformed into other representations, thus following a multi-view design approach [8]. In the following sections we introduce our approach.

5.1. Tool Support for the Design

In a previous lifecycle adopted in 2007 for the development of the online auction system, the first representation adopted for the *View* layer was a representation in conformity with the GUI Profile [28], illustrated in a UML representation in Figure 5. The literature recommends the usage of use case patterns and Master/Detail as a solution to facilitate the development of web information systems [17, 16]. To improve our previous practice

¹MockupToME web page. Available at: prisma.cos.ufrj.br/wct/projects/mockuptome_home.html.

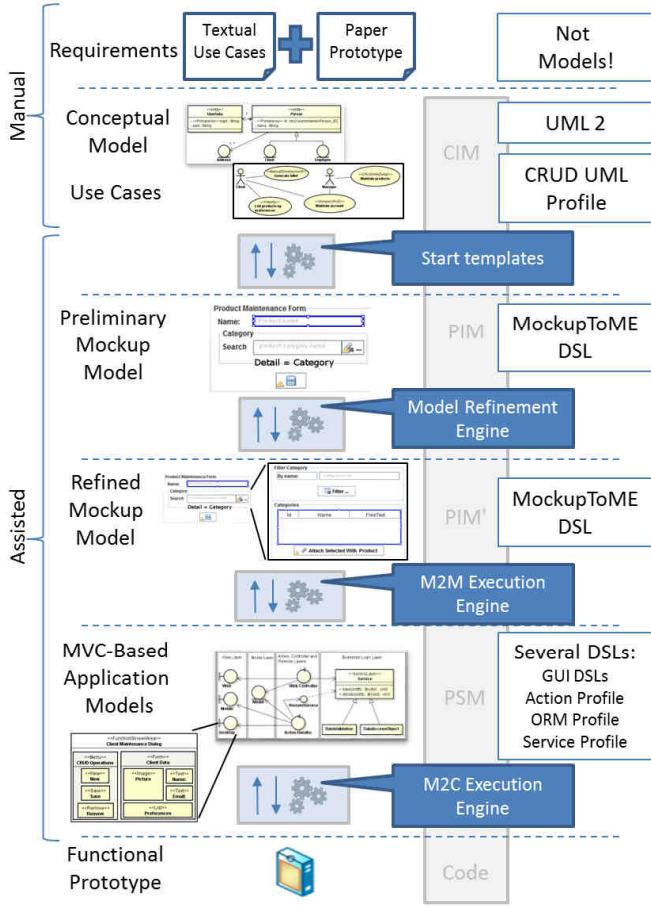


Figure 3: Model transformation lifecycle adopted in the automated design approach.

based on manual design of MVC-based application models, we adopted this recommendation. Besides, for the sake of offering for designers a better conceptualization than the one available in GUI Profile [28], we developed the MockupToME DSL considering these recommendations [17, 16]. Thus, our DSL is introduced after the representation of the conceptual model shown in Figure 6 and use cases, which are located at the top-part of Figure 3 as the first representation associated with models in the lifecycle.

We found that the GUI Profile is limited to the representation of GUI components and does not require concepts for Master/Detail. This limitation was surpassed using MockupToME DSL, which is used as front end for the representation of GUIs together with relationships of Master/Detail. However, the GUI Profile is not discarded. Instead, we considered it as a generic DSL for GUI components that follows other representation specific of target platforms.

In the lifecycle of our proposal, the GUI Profile is implemented through the metamodel illustrated in Figure 4 (B) and belongs to a set of representations called **MVC-Based Application Models**. This DSL is included in the second level of representation for GUIs called **Concrete GUI metamodel**, which in fact is generic and built on top

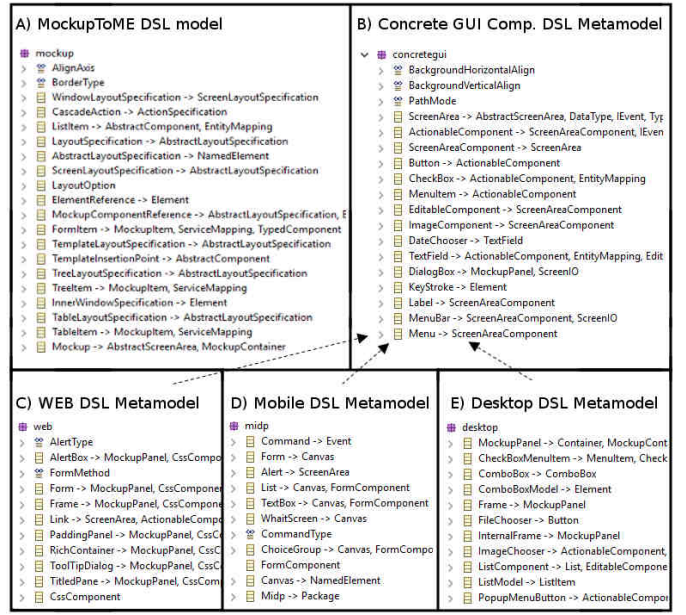


Figure 4: DSLs for representation of the View layer in different abstraction levels.

of other DSLs for platform dependent GUIs as follows: a) Web DSL metamodel is illustrated in Figure 4 (C) and allows the representation of details for components based on W3C/HTML 5 ²; b) Mobile DSL metamodel is illustrated in Figure 4 (D), which is based on the Java J2ME Components [22] programmed in MIDP and CDC-AWT ³; and c) Desktop DSL metamodel is illustrated in Figure 4 (E) allows the representation of details for components based on the Java J2SE/Swing components [22].

HTML properties such as `css`, `class`, `background`, etc., can be represented in components from the Web DSL, which is not possible to be specified in components that conforms to the MockupToME DSL. The same is valid for Mobile and Desktop DSLs. To focus on the methodology, this article does not provide details on such metamodels neither the conservatives UML extensions that belong to our UML Profiles.

To assist the representation of such models, our methodology includes tasks supported by (semi-) automated design techniques, which speed-up the specification of the detailed MVC-based models, allowing the use of iterations lasting one to two weeks. Thus, through an specification in conformity with MockupToME DSL, we included (semi-) automatic transformations from mockup models to other models in conformity with MVC-based architectures.

5.2. Lifecycle of Model Transformations

In the following we discuss some conceptual specificities used in Figure 3:

²<https://www.w3.org/TR/html5/>

³<http://www.oracle.com/technetwork/java/index-jsp-138820.html>

DSL = UML (GUI Profile + Action Profile)

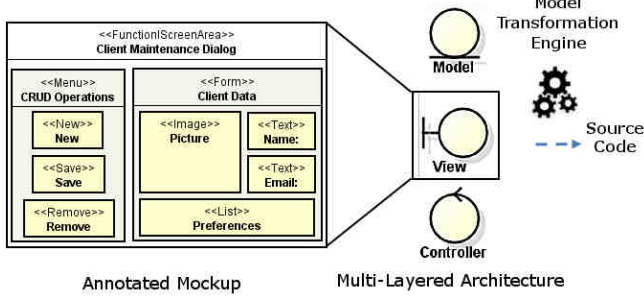


Figure 5: Illustration of an annotated mockup, manually designed in the Astah UML modelling tool with stereotypes from the GUI Profile [28] and our extensions from Action Profile, as part of the view layer of a multi-layered architecture based on MVC.

Preliminary specifications. Are textual use cases/user stories and paper prototypes, the minimum input for our approach to automate the design in MDWE. These artefacts are not model specifications and serve as guide for the designer that works in a use case, such as those illustrated in Figure 2. In preliminary software development phases, a requirement engineer draws user interfaces in a paper, based on use cases or user stories. The engineer is free to select techniques and tools to perform these tasks, such as use case augmentations [39], inspections, and pre-prototypes [27].

Mockups are models. In the modelling of web information systems, a mockup is a GUI whose components are associated with operations for CRUD, data filter and reports [39]. Following the motivating example, Figure 7 (2) shows the simplest structure for CRUD available in our prototyping tool⁴ for the design of a mockup that implements the use case **Maintain products**. The design in a mockup is semantically connected with one or more layout structures, e.g., with a GUI template for CRUD, that are commonly used in the development of web information systems.

Annotated mockup. As illustrates Figure 3, mockups are represented and refined in conformity with the MockupToME DSL. This language allows the representation of annotated mockups, as illustrated in the left-side of Figure 7 (2) through tags and stereotypes. Through annotations, the proposed mockups own semantics for action, as in the proposals by Ricca et al. [39] and Rivero et al. [12]. Mockup designs are annotated with semantics associated with standard actions, which are expanded in new mockups that implement the diverse scenarios of a use case. Thus, it is possible to infer the user interaction in these type of functionality, allowing to perform simulations in web browsers without the need to detail flows between GUIs.

Assisted design of models. In previous experiences

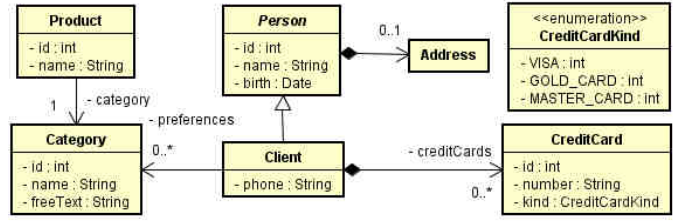


Figure 6: Conceptual model designed manually with the Astah UML tool. This is a logical view of the Model layer, illustrated as part of the scenario associated with the use case view shown in Figure 2.

we always looked for ways to speed-up the design of models, making them less dependent from specialists. For example, the set of artefacts found in our MVC-Based Application Models (see Figure 3) are divided in some layers represented with specific EMF-based DSLs and UML Profiles. Figure 5 illustrates some annotations based on the GUI Profile [28], applied manually for the view layer. However, several other layers and annotations from other UML Profiles are necessary to represent the set of artefacts. This requires a considerable time for design that should not be ignored in software projects conducted with short iterations. Through the execution of the overall automated design lifecycle illustrated in Figure 3, we can assist the representation of these model specifications, some generated automatically, refined by the designer in each phase of prototyping.

Start templates. The difference between template-based development and our approach is that templates are model transformations, thus not just as a source code facility. Likewise, we propose to use model transformations of type **start templates** to generate preliminary mockups. A start template is a classification of model-to-model transformations that allows the generation of a **Preliminary Mockup Model**, such as the one illustrated in Figure 7 (2). Mockups embed the structure for one or more start templates. This is illustrated in Figure 7 (1), which shows a start template executed against input entity classes designed in a class diagram shown in Figure 6. This allows the automatic generation of the mockup shown in Figure 7 (2). Therefore, a start template follows the same principles from GUI templates, but it is applied specifically to generate a model in conformity with the MockupToME DSL.

Refinement templates. A refinement template is similar, although strictly applicable to generate mockup structures for *Details* in representations for use case scenarios. For example, a *Detail* from the entity **Product** is **Category**. Considering the success use case scenario for **Maintain Products**, refinement templates are applicable to the entity **Category** in association with **Product**, allowing the generation of a **Refined Mockup Model** in the lifecycle. This is because a refinement template is associated with the *Find* pattern (see the button just above the **Remove** button in Figure 7), which allows to generate

⁴A demo from MockupToME tool is available at: <<https://www.youtube.com/watch?v=TrjuqLJMy8M>>.

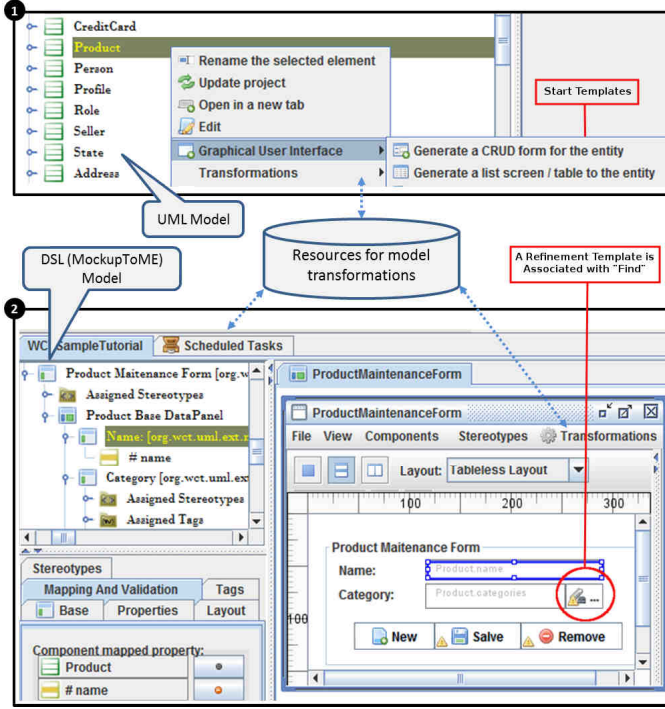


Figure 7: Screen-shots of models and start templates.

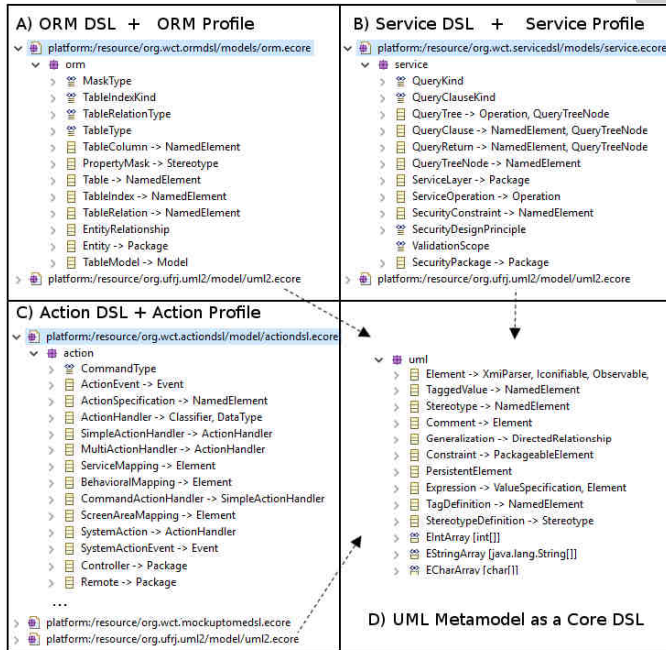


Figure 8: Metamodels for the representation of MVC-based Application Models.

automatically other mockups for *Search*. The generated mockup can also be refined in another specifications to *Create a Category* and so on.

MVC-based Application Models. An annotated mockup is an input for model-to-model transformations, that allows the generation of other specifications in conformity with DSLs, as illustrates Figure 8, used to represent

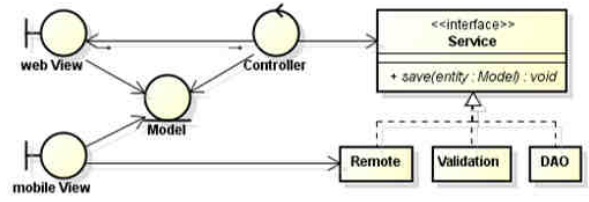


Figure 9: Structures for multi-layered application based on MVC.

MVC layers, as illustrated in Figure 9. Figure 8 (A) illustrates the metamodel for the representation of Object Relational Mappings (ORM) [22], the DSL for the representation of business logic and database queries is illustrated in Figure 8 (B), and Figure 8 (C) illustrates the metamodel for the representation of actions for the *Controller* layer. These DSLs extend the UML metamodel shown in Figure 8 (D), allowing the representation of annotations such as tags and stereotypes in conservative extensions. The Action DSL also extends the MockupToME DSL, allowing the connection between mockups and MVC-based Application Models.

Multi-layered MVC. Some companies promote the usage of more layers for better structuring the source code than those known in the MVC pattern [20]. As illustrated in the bottom-part of Figure 3, MVC-based Application Models are structured in multi-layers shown in Figure 9 using some DSLs shown in Figure 8. Likewise, apart from the Model, the View, and the Controller layers, our architectural models and the generated source code are divided in: a) **Remote layer** - it is a UML Class whose operations are annotated with tags and stereotypes from the EDOC UML Profile [40], used to integrate business logic in a web server with client applications such as mobile and desktop; b) **Validation layer** - it is a UML Class whose operations contain semantics for server-side logic to validate entities and properties, i.e., persistence constraints and regular expressions represented with metaclasses such as *PropertyMask* and *MaskType* shown in Figure 8 (A); c) the **Data Access Object (DAO) layer** - it is a UML Class whose operations are conformity with **ServiceOperation** shown in Figure 8 (B), which allows the representation of semantics to apply database queries from CRUD-related actions.

Functional prototype. A functional prototype is a fully implemented prototype that can be tested in iteration cycles of acceptance with clients. In a multi-view design approach, a functional prototype is obtained through the representation of models in a Platform-Specific Model (PSM) view [8]. Thus, our functional prototypes are generated after the architectural prototyping phase, after mapping mockup designs for an MVC-based model. A functional prototype is result from model-to-model transformations, manual model refinements and generation of source code through model-to-code transformations.

WCTSample. This is a web framework that imple-

ments a multi-layered architecture. The framework has 18 basic entity classes to support access control, customizable CRUDs and filters, functionalities to handle files, and images that are common features in many web information systems. This framework was used in the development of the two systems reported in Section 9.

5.3. Final Remarks

Although we focused and exemplified the design for a complex use case scenario associated with **Maintain products**, it is also possible to generate CRUDs for simpler scenarios [36]. For example, to persist a **Category**, the resultant mockup could be as simple as the one illustrated in Figure 7 without any information of *Detail*. Thus, the designer uses a start template and ignores the refinement templates. Moreover, for the design of simple mockups, some tasks included in our methodology can be ignored or partially used. Besides, it is always possible to represent components in mockups manually, detailing use case scenarios with annotations that are not supported in MockupToME tool. Thus, our contribution for automated design of mockups is complementary to manual design techniques introduced by Brambilla and Fraternali [41], Rivero et al. [12], and Ricca et al. [39].

6. MockupToME Method

Models are represented in different abstraction levels following a multi-view lifecycle in the MDWE scenario shown in Figure 3. This approach is discussed from the perspective of stakeholders interacting with the MockupToME Method, as illustrated in Figure 10.

Our methodology allows to work with four abstraction levels of artefacts associated with user interfaces: paper prototype, mockup model, concrete GUI models (platform specific), and functional prototype. Because we use more than one DSL in our approach, its systematization requires the following four different phases for prototyping:

1. Paper prototyping, which is executed in a requirement engineering discipline and represents the first view from the client about a functionality to be developed.
2. Evolutionary prototyping [25], which considers the worst-case scenario about the uncertainty of requirements as those found in start-up contexts [13]. This phase targets the exploratory development [42] of mockups with different options for clients to evaluate and decide which ones have to be used in his/her applications.
3. Architectural prototyping [20], which explores models that represent the MVC layers besides the View such as business logic, object relational mapping, and property validators.
4. Functional prototyping [25], which is the implementation of the source code for a functional prototype in which clients can perform acceptance tests.

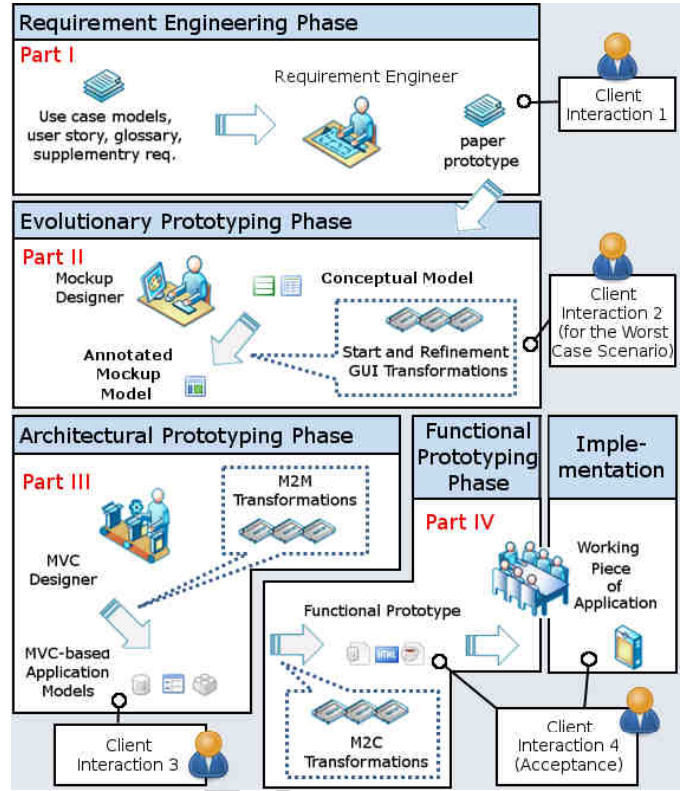


Figure 10: Overview of steps proposed for rapid application prototyping in four interactions with client in the MockupToME Method.

Not all tasks presented in this methodology are mandatory. Thus, the software engineer must decide in each task about optional elements, such as the representation of alternative mockups for the implementation of a given use case scenario. The design of mockups for some use case scenarios associated with CRUD can be complex, involving a set of specifications for GUIs, actions and entities that should be represented in synchrony. For example, the use case **Maintain products** illustrated in Figure 2 includes at least two scenarios that should be implemented: **Find and Select a Category**, or **Create a Category**. These semantics for actions are commonly found in use case scenarios for the development of CRUDs and present a standard workflow. Likewise, we found interesting to assist the design and refinement of these scenarios through automated design techniques.

Figure 11 presents our methodology in BPMN. It is used in every iteration by a *designer* and *developer* to perform many cycles of validation, allowing iterative and incremental steps towards the development of working pieces of application. The *designer*, which is a specialist in mockup and MVC, refines a generated mockup model choosing mutually exclusive mockup structures from Tasks *A* to *D*.

Tasks *A* and *B* are fully executed independently of the complexity of the use case. Considering the worst-case scenario for use cases, Tasks *C* and *D* are fully executed. In these tasks, different structures of GUI components can support alternative implementation strategies, for exam-

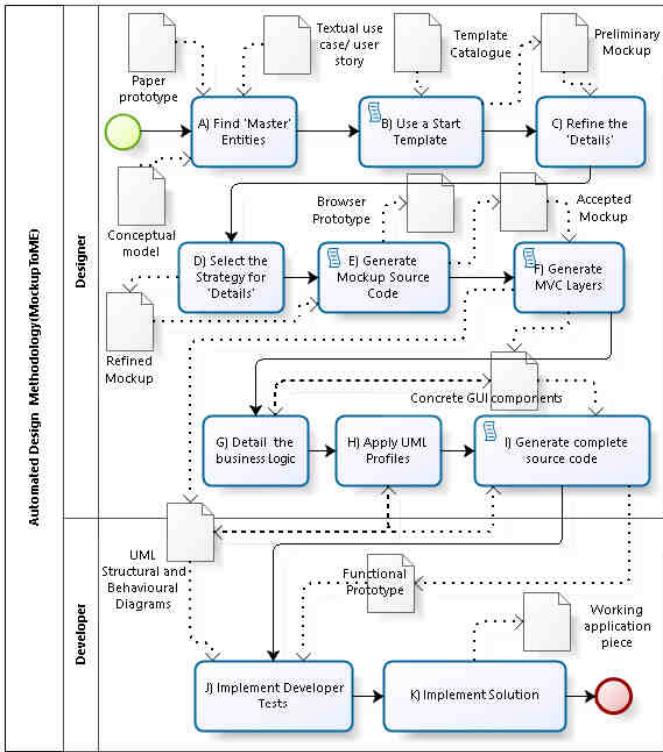


Figure 11: MockupToME Method with tasks assisted by tool, allowing the generation of models in different abstraction levels.

ple, different components, layouts and GUI templates for the same use case scenario. Finally, mockups are refined to support new suggestions.

A first executable prototype is obtained in Task E: **Generate Mockup Source Code**. The generated prototype is evaluated by clients to ensure that GUI flows and forms are in conformance with the expected behaviour to a given functionality specified in a textual use case scenario. Task F starts the **Architectural Prototyping Phase**, including the generation of models annotated with tags and stereotypes for business logic. An accepted mockup model is transformed into a concrete GUI model that is composed of DSL components supported by specific web technologies and APIs, e.g., an image chooser component. Concrete GUI components are refined in multiple views for each target platform.

A functional prototype with is generated from Tasks F to I shown in Figure 11. The source code is changed to adjust details, and usability tests are executed by clients. Differently from the first executable prototype that supports only the simulation of flow screens, the functional prototype is fully implemented in MVC layers.

Tasks J and K, performed by the **developer**, are discussed in Sections 7 and 8.

6.1. Part I: Requirement Engineering Phase

Use cases and paper prototypes are elicited in late phase of the software development process and are used as input to decide whether and how the MockupToME tool

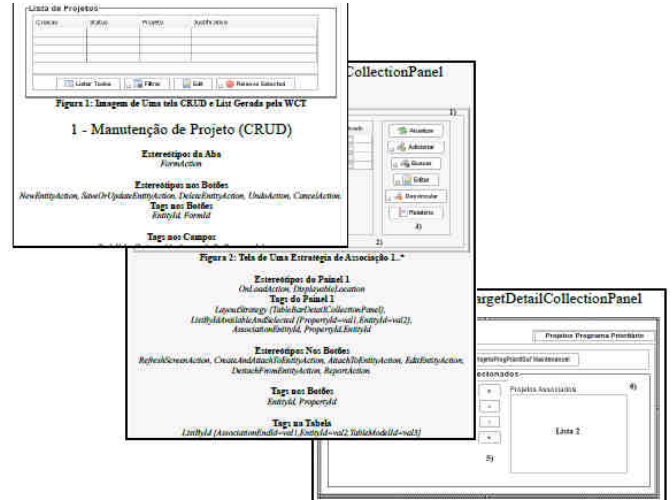


Figure 12: Template catalogue, used as a guidance for execution of an assisted design approach through the MockupToME tool.

should be used to automate the design of mockups. Our methodology starts, in fact, with a planning performed by a *requirement engineer* after the first *client* feedback from the designed paper prototype and use case.

In case of acceptance from these initial requirements, the requirement engineer will decide if the inputs are target for our automated design approach. This is possible due to a catalogue of templates that give instructions for design of some structures for CRUDs, List, Filters, and Reports named **Template catalogue**. This catalogue is illustrated in Figure 12 and presents screen-shots of GUI structures for each classification of use case patterns together with annotations for Master/Detail. A template catalogue is used by designers to decide which start and refinement templates must be used for the assisted design of a mockup model. The design is performed considering a paper prototype, making a semantic association among these three artefacts: template catalogue, paper prototype, and mockup model. The mockup is the unique model from these artefacts, thus this association is not physically established among them.

The generation of a preliminary mockup occurs by means of **Start templates**. In this task the engineer semantically links use cases with start templates. Differently from the previous case, this link is physically established through a property of metaclass **Mockup**, available in the MockupToME metamodel illustrated in Figure 4. This allows the connection of representations in conformity with MockupToME DSL and UML, as shown in Figure 8 (D).

6.2. Part II: Evolutionary Prototyping Phase

In this section, we include a systematization of the usage of MockupToME tool in our methodology, by describing the interactions of the client/product owner with the designed mockups and its construction.

Figure 11 illustrates the methodology that automates the tasks between requirement analysis and source code

generation, and this section systematises such tasks. To perform these tasks, end-users are assisted by tutorials and supported by tools discussed along the next sections, in which each task is detailed with: a) artefacts represented as input and output; b) a description of the associated model-based tool for design, refinement or transformation; c) client interactions with the artefacts; and, d) exemplifications.

6.2.1. Task A: Find Master Entities

Input: Textual use case, Use case diagram, Class diagram, Paper prototype, Template catalogue.

Output: Master entities are included in textual use cases and related with a use case diagram using a tag. This is required to keep traces between artefacts.

Description: After a textual use case is elaborated, the *designer* analyses the domain classes looking for those that are characterised as master entities by the domain-driven design [16] and the object oriented method [17]. Based on the paper prototype, the designer selects the *Master* entity from a class diagram shown in Figure 6, for each use case to be developed from the use case diagram shown in Figure 2.

Exemplification: After identifying the *Master* entity, the designer accesses inputs from Task A to identify which of the templates from the **Template Catalogue** is more adequate to start a design of GUI form. In order to automatically generate a mockup of type *form*, MockupToME takes as input a domain class diagram and, optionally, use cases. Forms are automatically generated through Start templates, selected in conformity with the use case scenario selected for development. For example, use cases shown in Figure 2 stereotyped with «FilterBy», «SimpleCRUD», and «CRUDWithDetail» are target for start templates, described in the artefact **Template Catalogue**. Use cases are not mandatory for the generation of a mockup because they are used only to instruct and document, differently from the *Master* entity. Thus, to design the solution for the use case **Maintain product**, the designer will use the start template **Generate CRUD form**, activated on the entity **Product**, as shown in Figure 6. The execution of this task is illustrated in Figure 7 (1).

6.2.2. Task B: Use a Start Template

Input: Textual use case, Use case diagram, Class diagram, Paper prototype, Template catalogue.

Output: Preliminary mockup.

Description: As in some web frameworks, many templates are available as a facility for codification of CRUDs: some are used to generate a mockup based on forms, other ones for list and filters, others for reports, between other structures. Instead of code facility, a **start template** is facility for the generation of preliminary mockup models. The artefact **Template catalogue** illustrates for the designer possible structures for generation of a **Preliminary mockup**. Likewise, this task aims at deciding which **start**

template is directed for the generation of a mockup that must be developed in each iteration of the software development process. Thus, the designer choose the **start template** that best meets the structures drawn in the **Paper prototype**.

Exemplification: The activation of start templates will display the wizard illustrated in Figure 13: **1)** the execution of the first step named **Select the associated use cases** establishes automatically a link between the mockup with the selected use case. Note that it was selected the use case **Maintain products**; **2)** The second step is to select the associations of the master class **Product** that will be included in the preliminary version of the mockup, i.e., the *Details* that will be included into the preliminary mockup. It was selected the association with **Category**; **3)** The third step is to configure for each selected association a *Layout Strategy*. A layout strategy is a template for *Details*, and it is independent from start templates and is used to provide a particular layout that will handle the selected association, thus implementing the relationship between Master and Detail. It is important to note that, as long as the paper prototype represents exactly what the client needs, this step is effective because the selection of a layout strategy will generate the mockup with the structure as represented in the paper prototype. However, the effectiveness of step 3 is not always true, which imply in some cases in which the client will request another layout strategy. MockupToME is ready for this situation, allowing changes after the execution of start templates through refinement templates (see Task C); **4)** The last step is to specify some properties of the mockup that will be generated after the mockup designer activate the button **Finish**.

Considerations: For the generation of a mockup without details, the designer should not select associations in the step 2. The non selection of at least one association will make the step 3 unnecessary. The result is a **Preliminary Mockup Model** with or without details.

6.2.3. Task C: Refine the Details

Input: Preliminary mockup, Master and Details, Textual use case, Paper prototype.

Output: Refined mockup.

Description: The refinement of the preliminary mockup is exemplified in Figure 14. The goal is to reach the representation of a **Paper prototype** in a mockup specification through refinements. This can happen if the designer selects wrongly the strategy for a *Detail* in the screen (3) from the wizard shown in Figure 13 or due to changes requested by the client/product owner. Likewise, after the generation of a preliminary mockup, the designer can change, if needed, the structure used to persist the *Detail = Category* inside a CRUD for the *Master* entity (**Product**), using other alternative structures for Master/Detail. In case these changes of structures are not necessary, then the designer apply adjustments in the

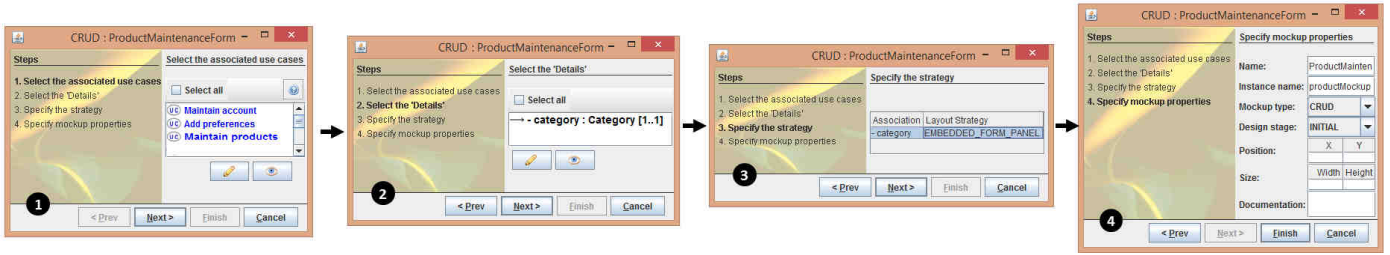


Figure 13: Wizard executed by start templates.

mockup specification and follows to Task E. In the worst-case scenarios, where the designer is not 100% sure about the acceptance of preliminary requirements represented in textual use case and paper prototypes, this task may introduce alternatives for implementation of a use case scenario. Thus, the goal in this task is, in the worst-case of a software project that presents some uncertainty on the preliminary requirements, the generation of alternative structures to support the same master/detail relationship.

Exemplification: In the current format, a product and its category are persisted in different transactions, each one having its own Form and Save button, as illustrated in the top-part of Figure 14. This structure should be changed by the one illustrated in the bottom-part. Our tool facilitate the application of this refinement. The transformation of one structure into another is an easy task since model transformations are available in pop-up menus executed over each of the elements of designed mockup shown in Figure 14 (1). Using the drawing area one can undo transformations to decide what strategy best fits to express a specific part of functionality. Assume that the mockup designer selects the option **Find and Attach** in the second step and that panel titled **Category** with a component to *Find* something is automatically generated and configured. In this example, a refinement generated two mutually exclusive *Layout Strategies* i.e., Figure 14 (1) and (2).

Strategies to Refine Details in Associations of Type (0..1): The use of different strategies to handle the same master/detail relationship are shown in Figure 15. Given that compositions between *master* and *detail*, entities can be implemented with different structures as well as using different GUI components. Templates for *Detail* are called **refinement templates** and support flexible mockup constructions. Figure 15 (1) shows the structure generated using a refinement template called **Embedded Form**, Figure 15 (2) shows the structure generated using another called **Select Single and Attach** and the third is called **Find and Attach**. The original strategy illustrated in Figure 14 (1), whose template is called **Independent Form**, will persist data from **Product** and **Category** in different database transactions. The strategy used in Figure 15 (1) owns semantics for actions (i.e., annotations) that dictates that, when the **Save** button is pressed, then the data from the *Detail = Category* is persisted in

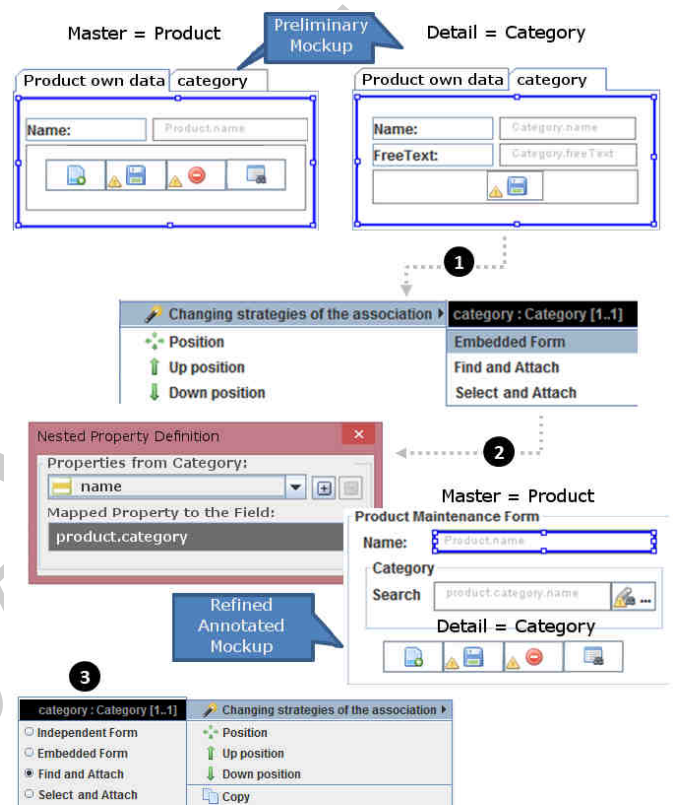


Figure 14: Steps to refine annotated mockups: changing refinement strategies to handle associations.

the same transaction as the data from the *Master = Product*. The **Select Single and Attach**, shown in Figure 15 (2), owns semantics that dictates that all the *Details = instances of Category* will be loaded from the database, inserted into the combo-box, and the selected one is merged with the *Master* after the button **Save** is pressed. The last, shown Figure 15 (1), owns semantics that allow the user to specify a filter for the *Detail*, merging the detail into the master. These annotations and the associated UML Profiles are discussed in Section 10.

Success Scenario: Assuming that in the **Paper prototype** the drawing is similar to the strategy shown in Figure 15 (3), the designer must now detail the actions from end-users derived from this mockup. Thus, the use case **Maintain products** presents the success scenario namely **Find and Select a Category** that must be detailed. Task

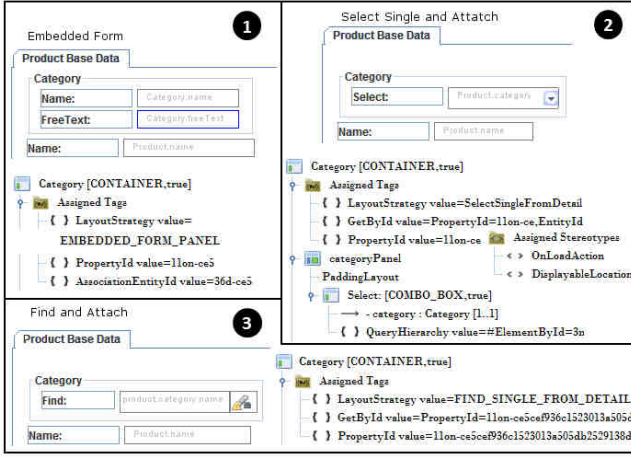


Figure 15: Layout strategies for 0..1 relationships.

C is useful for detailing this success scenario for such a use case, as illustrated Figure 16. This is because through the refinement templates we can assist designers in the modelling of the sequent mockup, designed for the implementation of another associated mockup that *Find* and *Select* the category, required for inclusion in a product. In this example, the mockup shown on the right side of Figure 16 (A) is automatically generated through a refinement template associated with the button *Find*.

Alternative Scenario: Task C is important for detailing alternative scenarios too. The use case *Maintain products* presents an alternative scenario for the case when the category is not found through the the mockup shown on the right side of Figure 16 (A). Thus, the category must be created so that the end-user re-execute the success scenario. Assuming that the *paper prototype* presents a GUI similar to the one shown on the right side of Figure 16 (B), the left side of this figure shows the popup menu from MockupToME tool that allows the execution of the appropriate refinement template. This is possible because the designer add a new button on the form for *Filter*. This button is stereotyped as «EditEntityAction», which allows for our tool to associate and recommend refinement templates for detailing the action in a new mockup.

6.2.4. Task D: Select the Strategy for Details

Our tool support is important for the execution of a creative and incremental design process in MDWE, allowing for designers to explore use case scenarios. This is important when some functionalities present uncertainty on the requirements. For example, the case that the client changed his idea about the implementation of a scenario developed in a previous iteration and also along the same iteration. This is a little bit common in start-up contexts [13]. In this case, the designer should consider changes before starting the design of models associated with new use cases or the architectural models, discussed in the *Architectural Prototyping Phase*. When this worst-case scenario occurs, then it is important to apply the changes

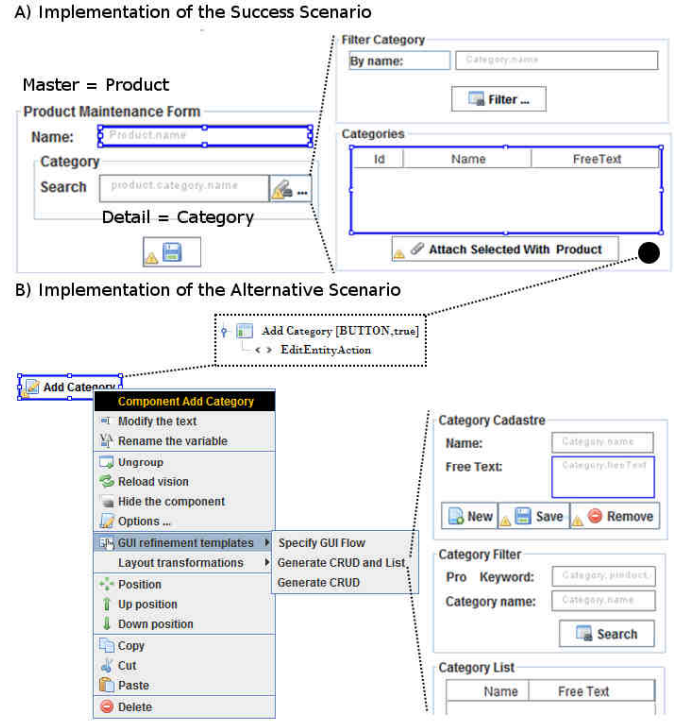


Figure 16: Implementation of scenarios for the use case *Maintain Products*.

in models, starting by modifications in mockup specifications. Thus, Task D is defined in MockupToME Method for designers to deal with this situation.

Input: Refined mockup (i.e., with different GUI structures).

Output: Refined mockup (i.e., with selected components).

Description: This task is executed only if the designer includes in Task C options for *Master* and *Detail* that should be re-validated by the *client*, otherwise, the *designer* should skip it and perform Task E. Task D is useful for the worst-case scenario, when textual use cases and the paper prototype present uncertainty from the point of view of *client*. The *designer* may alternate between strategies used to structure each association owned by the *Master* entity. Then, options available for the designed mockups are accorded between client and designer in a second cycle of validation. Besides, considering the worst-case when requirements change with frequency among iterations, thus needing to change models designed in previous iterations. It possible to undo a refinement performed in Task C and also to select which strategy better meets to the requested change in a new iteration.

Exemplification: Tasks C and D allow the execution of an iterative and incremental design approach, always updating previously designed models and keeping them synchronized along the execution of iterations. Consider the mutually exclusive layout strategies shown in Figure 14 (3). Each menu item will select one of the layouts shown in Figure 15, which may occur in worst-case scenarios. Tag

`LayoutStrategy=xyz` shown in Figure 15 (1-3) provides semantics that links to the adopted refinement template. Note that, after the selection of a strategy for each *Detail* relationship, mockup components are not removed, but deactivated. These elements allow to group and select strategies for *Master and Detail*. In case a sequent refinement is needed after a selection, than the mockup designer will detail the sequent actions, starting a new instance of the proposed methodology. For example, if the selected strategy is the one illustrated in Figure 17 (2), the warning icon associated with the button decorated with the *Find* icon suggests that this component needs refinement. In this case, a new mockup annotated with «FilterBy» must be specified and associated with the *Find* button. This is a very similar situation to the use case *List products by preferences*, shown in Figure 2. MockupToME assists the designer in the representation of the sequential refinements, allowing the automatic generation of new mockup shown in Figure 17 (3) and the specification of the *Filter* operation shown in Figure 17 (4) with the help of a wizard.

Client Evaluation: Through the popup menu items shown in Figure 14 (3), and together with the mockup designer, the client can *interact/simulate* with the mockup before the source code is generated, deciding the best structure for a mockup. In the case of non-acceptance or corrections in mockups, previous tasks are executed again until the client decide for a specific structure. In the case of acceptance, the next task is executed. Thus, following the motivating example, assume that the client has selected the option *Find* and *Attach*, resulting in an accepted mockup as illustrated in Figure 14 (2).

Final Steps: After client acceptance, GUI components are more detailed, components are standardized in size, position, font, etc.

6.2.5. Task E: Generate Mockup Source Code

A choice made by the client about strategies in mockups will allow the mockup designer to generate the source code. This code is used to apply the first test of a runnable prototype (a *Browser prototype* generated directly from a mockup). Thus, associated with the previous tasks, only active mockup components are considered during the source code generation.

Input: Refined mockup (i.e., with different structures).

Output: Browser prototype, accepted mockup.

Description: The execution of Task E implies in the use of a model-to-code transformation that generates source code for HTML 5 directly from mockup. This transformation is simpler than others performed in Task F, which includes model-to-model transformations from mockup to multi-layered model elements named **UML Structural and Behavioural Diagrams**. In this case, only the view layer is generated as source code. In the next phase it is also possible, using model-to-model transformations, to generate what we call **Concrete GUI Components**, characterized by other models in conformity with three other DSLs

for GUI (Desktop, Web and Mobile). Both transformations enable the simulation of GUI's flows and user interactions in a web browser. Thus, the client evaluate the **Browser prototype** and, in case of acceptance, the next prototyping phase is executed.

6.3. Part III: Architectural Prototyping Phase

Tasks A to E are used to generate the first compiled prototype based only on mockups. Tasks F to H aim at generating other model specifications that connect GUI DSLs and business layers implemented with MVC-based models. Therefore, instead of using only the Mockup-ToME DSL and entity classes/use cases discussed in the previous phase, the architectural prototyping phase includes model specifications considering heterogeneous DSLs.

In this section, we introduce the underlying architecture that implements the MVC pattern. We separate the business logic from the controller layer to better modularize the source code. Thus, the semantics for business logic is placed in a UML interface stereotyped as «Service». This interface is implemented by other layers such as: a) Remote; b) Validation; and, c) DAO.

The architectural prototyping phase represents the transition from mockup specifications illustrated in Figure 17 (2 and 3) to other MVC-based layers illustrated in Figure 17 (4-9) which, follows the structures of a multi-layered MVC. In this phase, models in (4-9) are generated and refined, e.g., detailing properties of GUI components that are not possible to be represented in mockups. In our first MDWE approach dating back 2008 [43] we used to represent these models manually. Due to the introduction of evolutionary prototyping, these models are now automatically generated. Besides, in this stage, the client has already accepted the designed mockups. Thus, this is the correct moment to detail elements associated with the MVC.

6.3.1. Task F: Generate MVC Layers

In this task, mockups are transformed into MVC-based model application layers as follows.

Input: Accepted mockup.

Output: Concrete GUI components, controllers and services, UML structural and behavioural diagrams.

Description: Once the mockup model is validated and a structure for a mockup is decided, the process towards generating a functional prototype can be executed. This implies in generating all web information systems layers considering the selected domain features. Figure 17 presents the generation of other layers of the MVC from mockups. Some of these layers are represented with UML Profiles (Entity and Service) and others with DSLs that extends the UML metamodel (Controller and View). The execution of this task outputs the following artefacts:

Concrete GUI Components. MockupToME DSL have few properties to set GUI components, thus in a high-level of abstraction than target platforms, e.g., Mobile, Desktop, and Web. To represent a GUI in a target

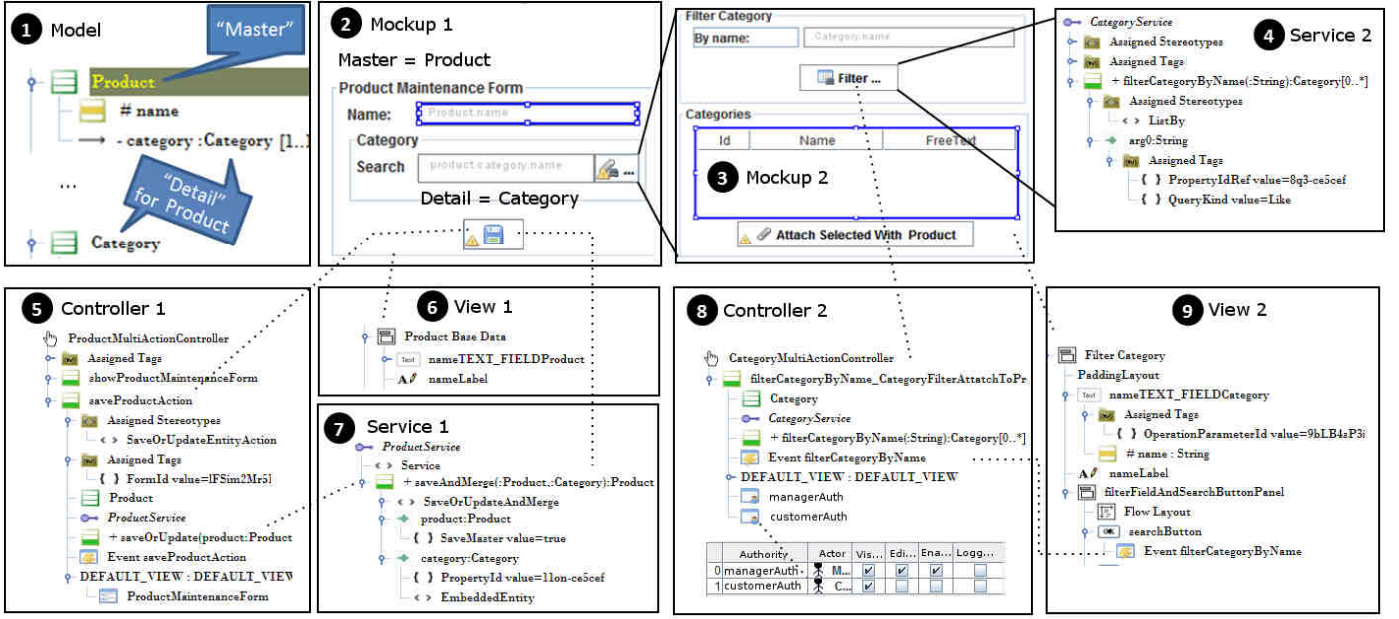


Figure 17: Design elements represented through the methodology in support for the use case Maintain Products.

platform, mockups must be transformed by means of specialized DSLs. Thus, three DSLs for GUI can be used and are supported in our set of model-to-model transformations: 1) the Web DSL; 2) the Desktop DSL; and, 3) the Mobile DSL. Figure 17 (6 and 9) shows the elements generated from mockups (2 and 3) conforms to the Web DSL.

Controllers and Services. The buttons specified in mockups own semantics for actions. For example, the Save button allows to persist entities and the button Filter allows to query a database. These buttons allow us to infer the flow between the user interfaces. For example, MockupToME keeps a trace/flow that connects the mockups shown in Figure 17 (2 and 3). Another example of inference is the button Save, that for the success view will show the List Form and for the error view will show the Crud Form. Based on these inferences, Controllers (see Figure 17 - 5 and 8) and Service interfaces (see Figure 17 7) are automatically generated. Controllers are in conformity with the Action Profile, a DSL that extends the UML we have developed to handle actions commonly associated with the Spring Framework, e.g., simple form controller, multi-action controller, command controller. Service interfaces are in conformity with the Service Profile, a DSL that extends the UML to represent database query semantics.

UML Structural and Behavioural Diagrams. Each application layer derived from the Service or Controller models belongs either to validation, or to persistence, or to remote operation calls, and are generated only when Desktop and Mobile DSLs are used. Figure 18 shows three layers derived from the interface `ProductService` represented in a UML sequence diagram. This diagram is optionally represented for use cases that are automated through our

methodology, because the model, view, controller and service layers are already linked during the transformation from a mockup (see Figure 17 - 5, 6 and 7). For manually designed functionalities, the messages between these layers must be manually annotated. The exemplified messages define flow and business logic operations related to entity Product: (`ProductRemote` or `ProductMultiActionController`) + `ProductServiceValidator` + `ProductServiceDAOHibernate`.

Generation of Platform-Specific Models for GUI. The GUI components represented in a mockup model are conform to the MockupToME DSL, and must be transformed to one or more platform-specific models for GUI. For example, if requested by the client, the designer must select a mockup model and execute a specific model-to-model transformation to generate a specification in conformity with the Web DSL. Thus, the designer can transform a mockup to one or more DSLs for GUI: Web DSL, Mobile DSL and Desktop DSL. Each platform-specific model for GUI must be manually enriched with details from each DSL. If transformations for desktop and/or mobile platforms are executed, then the generation and refinement of a class from the Remote Layer is required [44], which allows to apply remote connections between devices and the web server. Therefore, this approach allows for designers to represent details from each platform supported in the underlying implementation framework.

Exemplification. For applications that run in a desktop platform, the designer generates a model in conformity with the Desktop DSL, used in the end of our model transformation lifecycle to generate source code mapped into the Java Swing API. The multi-layered architecture allows remote connections from client platform (Desktop)

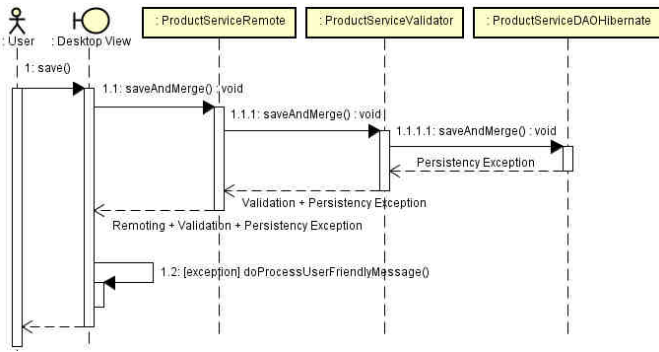


Figure 18: Message call to process the action `saveAndMerge` in the underlying multi-layered architecture.

with the server platform. In case of platform-specific models for GUI in conformity with the Mobile DSL, the architecture works in the same way. We have already tested it through remote *http* connections, linking mobile devices programmed with J2ME API and the web server with remote calls, as exemplified in Section 7.3. Thus, the Remote layer delegates operations to a validation layer which is hosted by the web server. In the case of exchange of *View* platforms in the client side, e.g., instead of GUI developed for Desktop use GUIs developed for Mobile devices, at least the validation layer and persistence layer are reused.

Client Evaluation. Two model elements generated in this phase are important for client evaluations. **A)** the **concrete GUI components** which, for the reported experiences in the next sections, uses the Web DSL. The model associated with the artefact **concrete GUI components** is, therefore, a DSL in a platform-dependent model view for GUI in a lower abstraction level than a mockup, which is a platform-independent model for GUI. This model owns a unique structure, does not have deactivated components neither master/detail properties, and its components are able to store specific properties that the mockup does not support, such as events, layout, and appearance properties. **B)** the controller layer, in which action/event components are defined also as a domain-specific models. Thus, with these two generated elements and considering only the use of Web DSL, a second browser simulation can be performed by clients considering the View and Controller layers.

6.3.2. Task G: Detail the Business Logic

Input: Concrete GUI components, controller, master and detail entities.

Output: Controller and GUI components with authority mappings, service UML interface.

Description: This task intends to generate other specific model layers that are mostly mapped into the DAO layer, to constraint controller layer access, and to constraint GUI fields with security details. The bottom-part of Figure 17 shows a piece of the wizard to annotate the Controller model responsible to represent access constraints.

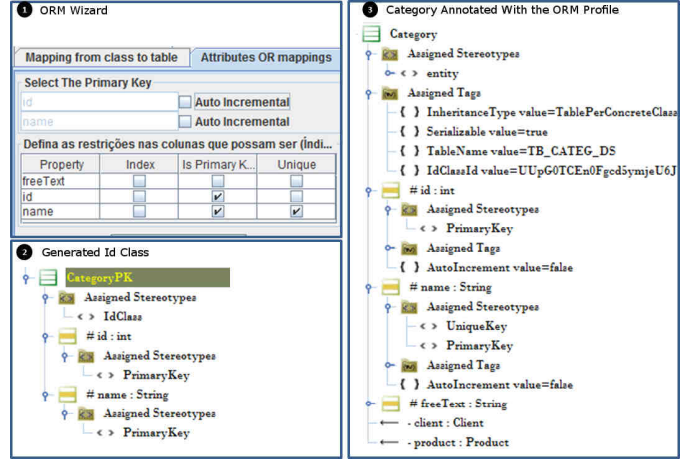


Figure 19: Entity layer annotated with the ORM Profile with the help of a wizard.

For an example related with the controller operation, assume that **functionality = elements 4, 8, and 9** from Figure 17. This example shows that the actor **Manager** has full access to the functionality **Filter Category**, while the actor **Customer** can only visualize it.

6.3.3. Task H: Apply UML Profiles

This task is assisted by wizards such as the one exemplified in Figure 19.

Input: Domain-Specific Models (Concrete GUI components and Controller layer), Elements Annotated With UML Profiles (Model layer and Service Interface).

Output: Input elements with more annotations to allow the execution of platform-independent model to platform-specific model transformations.

Description: This task is optional, since one can be interested in transform domain-specific input models into UML models. Besides, aiming at generating a more complete source code, the *designer* can specify some details such as annotations, not generated by previous transformations. To represent annotations for ORM, it is used a wizard to decorate entities. This is exemplified in Figure 19 (1), where a wizard allows the generation of an **Id Class** in Figure 19 (2) followed by a guided annotation, resulting in the annotated entity named **Category** as illustrated in Figure 19 (3).

Source Code Generation: Model-to-code transformations are applied against the input elements to map them to the Java architecture used by the development team. This transformation enables the generation of a functional prototype, since all layers are generated as source code. Afterwards, source code is refined by programmers and then tested. For example, ORM annotations are used to generate Java classes decorated with the JPA [22], as exemplified in Section 7.

Client Evaluation: Finally, the client performs his/her forth interaction for the acceptance test. Then, improvements and corrections are made in the generated functional

prototype, delivering a working piece of application, the last software artefact as shown in Figure 11.

6.4. Part IV: Functional Prototyping Phase

A fully executable piece of software is obtained in this phase, where generated prototypes are target for acceptance tests. These artefacts are then detailed and used by a development team. Using model-to-code transformations it is possible to generate functional prototypes, which can be tested by clients in web browsers. Therefore, a functional prototype is a fully implemented functionality, e.g., considering the implementation of database transactions and queries, which must be tested by clients in a real-world scenario.

6.4.1. Task I: Generate Complete Source Code

Input: All aforementioned models.

Output: Source code for MVC-based layers.

Description: The result is a fully testable platform-independent model prototype. This is achieved after the usage of a platform-independent model to generate platform-specific model transformations. This means that all strategies used in annotated mockups imply on the use of different transformations from platform-independent models to platform-specific models. Currently, model transformations enable the generation of source code for the following layers:

1. Model-Entity layer with support of object-relational mapping details;
2. Controller-Business layer with support for transactions involving the service/business layer and calls for a remote access layer;
3. Controller-Persistence layer with the layer for handling the data access object;
4. Controller-Actions layer to handle GUI events;
5. View layer in the client side application.

Figure 20 illustrates components that, except for the *Model-Entity*, implement aforementioned layers of a functional prototype. Thus, as part important of the Functional Prototyping phase, Section 7 provides information about the implementation of these components.

6.5. Final Remarks

It is important to mention that the usage of model transformers to refine mockups is a practice that can also be used by other MDWE proposals. Thus, the concepts introduced in MockupToME for semi-automated refinement of mockups are general and useful for researchers and practitioners of MDWE.

7. Implementation

The aforementioned automated design tasks were used in the development of real-world web information systems. In this section, we present implementation details, including artefacts generated in the *Functional Prototyping Phase*.

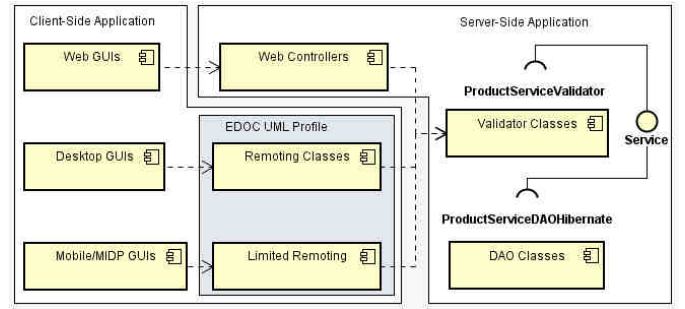


Figure 20: Component diagram describing the architecture.

7.1. Underlying Architecture

Following the motivating example, this section exemplifies the classes that are generated from the models represented in the *Architectural Prototyping Phase*. These classes are connected in a logic flow illustrated in Figure 18 as a UML sequence diagram. For GUIs developed for Desktop or Web platforms, these method calls are similar. Both GUIs will delegate the processing of business rules for a Validator class hosted in the web server which, in turn, delegates the task of persistence for the persistence layer. This flow between layers is performed/injected by Spring Framework. When one need to change something in the application regarding the business layer, it will be made in the control layer `xxxMultiActionController`, and/or in the validation layer `xxxServiceValidation`, and/or in the persistence layer `xxxServiceDAOHibernate`, where `xxx` is the name of the associated entity. Actions found in screen flows will be handled in the controller, or in action listeners developed for Swing or in commands developed for J2ME/MIDP.

The generated source code includes the GUI layer for Mobile, Desktop and Web platforms, data access layer, entity layer, integration/remote layer, xml configuration files, text files, Java classes, data base scripts, models, etc. The following configuration of technologies from the underlying target platform are used in WCTSample, the pre-configured MVC framework for web development used in our experiences, which is composed by: Hibernate, JPA, jQuery, JSTL, Swing, PostgreSQL, Apache Commons Validation, and Spring Framework. This architecture is flexible and supports changes through the FOMDA Approach [34]. For example, the following technologies were changed in the underlying implementation of WCTSample across software projects: 1) first, software projects dating back 2008 used HBM files to apply Hibernate mappings (ORM) and in recent projects JPA was used; 2) the first software project was developed at Adapit adopting Dojotoolkit API as web technology to write rich GUIs, and in the second project we used jQuery.

7.2. Generated Source Code

Figure 21 shows the resultant GUI from the overall methodology. This GUI is executed in a web browser and

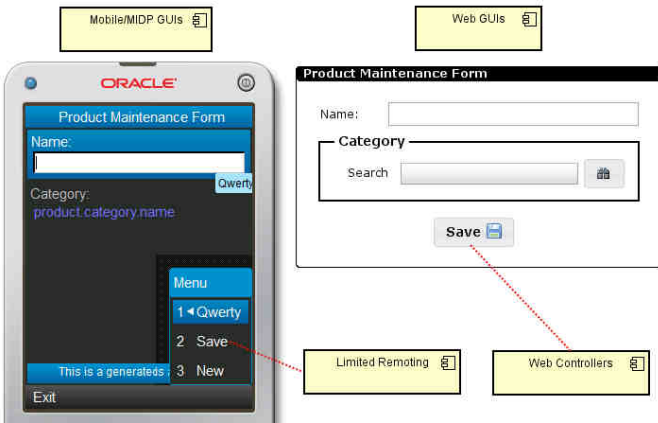


Figure 21: Resultant GUIs executed in a mobile emulator and in a web browser.

represents the functional prototype for the use case **Maintain products**. Behind this simple GUI, several application layers based on the MVC connects GUI components, action and flow handling, field validation and database persistence. These layers are presented in the following.

The source code generated for the entity **Product** is illustrated at the center of Figure 22. Note that a dashed line includes the mapping from tags and stereotypes from our UML Profile for ORM to the JPA representation. Besides, XDoclet comments such as the operation `getName` are also mapped into the Apache Commons Validator API, which automatically validate GUI form fields. As long as the MVC designer specifies ORM annotations using the wizard shown in the right side of Figure 22, the source code generated for Entities will not require manual changes.

Figure 23 exemplifies the source code generated for the Validation layer located in the server-side. Each action/button specified in a mockup that semantically submits a form, e.g., «SaveOrUpdate» and «FilterBy», also presents an implemented operation into the `xxxValidator` class. The implementation of the operation `saveAndMerge` delegates for the Spring Framework API the checking if the data from the instance of **Product** are valid. In the case it is valid, then the operation delegates the task to persist the instances of **Product** and **Category** to the DAO Layer (injected into the property `productService`). In case of invalidity, then an exception is thrown to be handled in the client-side, where a GUI will presents a user friendly message. The developer is free to include a specific validation in source code if he/she needs. Thus, this operation do not require changes to work in a functional prototype.

Figure 24 shows the implementation of the DAO layer with the Hibernate. Soon after opening a database transaction, the instance of entity **Category** is set to a persistent state: `session.refresh(category)`. This clean any information owned into the parameter `category` except the primary key. This is due to the stereotype «EmbeddedEntity» assigned by the parameter illustrated in the top of Figure 24, automatically generated along the transfor-

mation from a mockup to the Service UML Interface. This operation do not require changes to work in a functional prototype.

Figure 25 shows the source code required to handle the action `saveProductAction`. This action is mapped to the button **Save** from the JSP source code presented in Figure 26. The operation `saveProductAction` first binds the request parameters into the properties of the entities represented in the mockup, then it propagates the validation and persistence for the other layers. The last part of the source code is dedicated to process exceptions that came from the *Validator* and *DAO* layers. Note that the validation is delegated to the *Validator* layer, which is injected into the property `productService`. This controller has a considerable amount of source code because it was generated based on the Multi-Action controller from the Spring Framework, which have several operations.

The source code for JSP [22] is shown in Figure 26. The top-part of Figure 26 (A) shows the header information included in all root JSPs, e.g., the ones directly associated with a mockup, with the information necessary to use the access control functionality from the WCTSample framework. The bottom part of Figure 26 (A) shows the source code that maps the properties from entity **Product**, e.g., `id` and `name`. Figure 26 (B) shows the source code for pane **Category** which associates the action of button **Find** to the controller `CategoryMultiActionController`.

7.3. Implementation for Mobile

These source code illustrate the minimum artefacts generated by our approach in the development of a functionality for web information systems. However, other devices can connect with these functionalities available on the web server. For instance, the web server can provide access to external components, such as GUIs developed to run in mobile devices and in desktop applications. Thus, our model transformation lifecycle supports the generation of GUIs programmed with J2ME and, for desktop applications, programmed with J2SE. Thus, two other DSLs are important besides **Web DSL**: the **Mobile** and **Desktop DSLs**.

We demonstrate the worst-case scenario on the refinement of a model in conformity with **Mobile DSL**. The connection between *MockupToME DSL* and *Mobile DSL* is through transformations, as illustrates Figure 27. The first DSL holds richer types of GUI components than those available in the **Mobile DSL**. If a GUI for mobile platform is needed, then the designer executes a transformation from a **model 1**, which is in conformity with *MockupToME DSL*, to another **model 2**, which in conformity with the **Mobile DSL**. This transformation is illustrated in Figure 27 (1) and shows a piece of a model-to-model transformation. The result is the **model 2** shown in Figure 27 (2).

Mobile DSL represents the J2ME profile named **CLDC**, thus for a limited GUI API. Because **model 2** owns less representative GUI components than the *Mobile DSL*, there is lost of information about layout from transformation

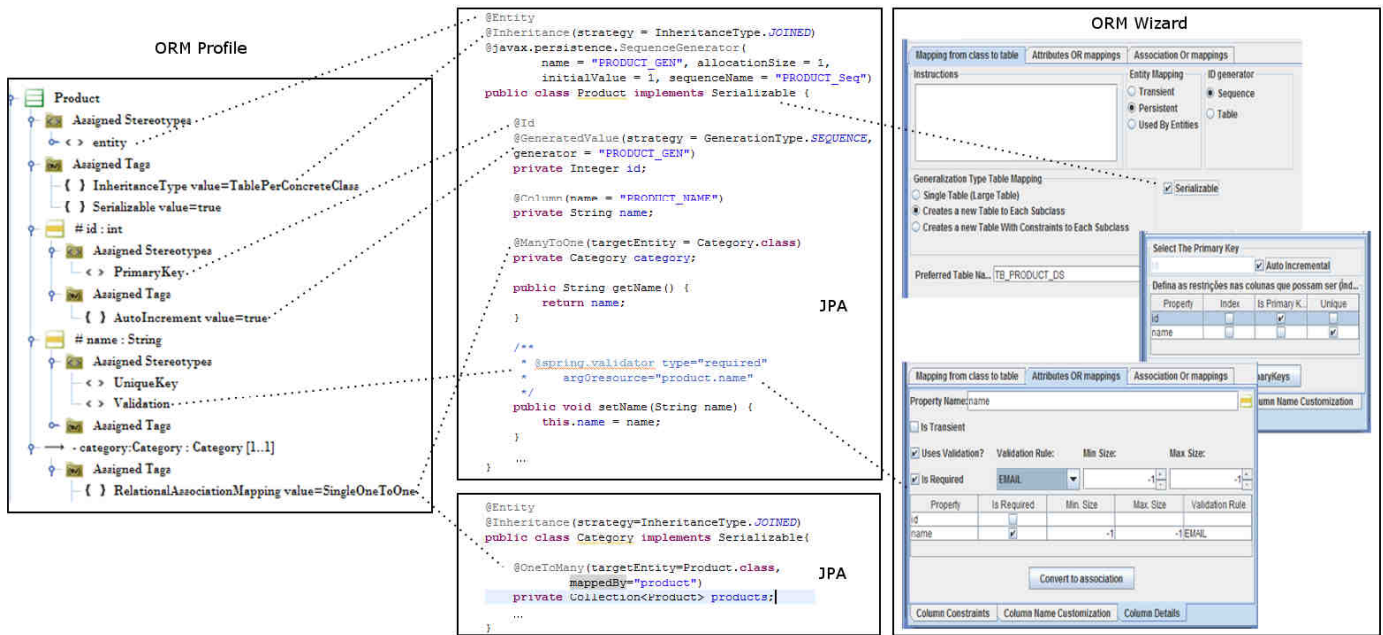


Figure 22: Generated source code for the *Model* layer implemented with JPA (2.0).

```

/**
 * @spring.bean id="productServiceValidator" singleton="true"
 */
public class ProductServiceValidator implements ProductService {

    private ProductService productService;
    private BeanValidator validator;

    /**
     * @spring.property ref="productServiceDAOHibernate" singleton="true"
     */
    public ProductService getProductService() {
        return productService;
    }

    @Override
    public Product saveAndMerge(Product product, Category category)
        throws FieldMsgValidationException, ValidationException,
        NonUniqueObjectException, ConstraintViolationException,
        DataException, Exception {
        //Automatic validation with Apache 'commons validator'
        BindException errors1 = new BindException(product, "product");
        validator.validate(product, errors1);
        //in case product data is not valid, throws a ValidationException
        //for custom validations, then throws FieldMsgValidationException
        if (errors1.hasErrors()) {
            throw errors1;
        }
        //case is valid, call the DAO layer to persist product and category
        return this.productService.saveAndMerge(product, category);
    }
}

```

Figure 23: Generated source code for the *Validation* layer implemented with Springframework and Commons Validator.

from model 1 to model 2. For example, the transformation illustrated in Figure 27 (1) show that a component instance of *ScreenLayoutSpecification* (in conformity with *MockupToME DSL*) is transformed to another component instance of *Form*, which is in conformity with *Mobile DSL for CLDC*. While the first supports layout managers such as a flow layout, used to centralize components such as the button *Save* illustrated in Figure 21, the second does not support layout manager. This component in model 1 in conformity with *MockupToME DSL* is of type *Button*, while for the model 2 it is instance of *Command* in

```

/**
 * @spring.bean id="productServiceDAOHibernate" singleton="true"
 */
public class ProductServiceDAOHibernate
    extends HibernateDaoSupport implements ProductService {

    @Autowired
    private SessionFactory sessionFactory;

    public List listByCategory(String categoryName)
        throws DataAccessException {
        String name2 = "%" + categoryName + "%";
        return openSession().createQuery(
            "from Product product " +
            "where product.category.name like ?")
            .setParameter(0, name2).list();
    }

    public Product saveAndMerge(Product product, Category category)
        throws FieldMsgValidationException, ValidationException,
        NonUniqueObjectException, ConstraintViolationException,
        DataException, Exception {
        org.hibernate.Session session = openSession();
        try {
            session.beginTransaction();
            session.refresh(category);
            product.setCategory(category);
            session.saveOrUpdate(product);
            session.merge(category);
            session.merge(product);
            session.getTransaction().commit();
            return product;
        } catch (Exception ex) {
            ex.printStackTrace();
            session.getTransaction().rollback();
            throw ex;
        } finally {
            if (session != null && session.isOpen()) session.close();
        }
    }
}

```

Figure 24: Generated source code for the *DAO* layer implemented with Hibernate in HQL.

conformity with *Mobile DSL*, as illustrates Figure 27 (4).

```

@Controller
public class ProductMultiActionController
    extends MultiActionController{

    @Resource(name="productServiceValidator")
    private ProductService productService;

    public Product bindProduct(HttpServletRequest request)
        throws Exception{
        Product product = new Product();
        product.setId(java.lang.Integer.parseInt(
            request.getParameter("product.id")));
        product.setName(request.getParameter("product.name"));
        return product;
    }

    public Category bindCategory(HttpServletRequest request)
        throws Exception{
        Category category = new Category();
        category.setId(java.lang.Integer.parseInt(
            request.getParameter("product.category.id")));
        return category;
    }

    @RequestMapping("/saveProductAction.html")
    public ModelAndView saveProductAction(
        HttpServletRequest request,
        HttpServletResponse response ){
        try{
            //bind form attributes into the entities
            Product product=bindProduct(request);
            Category category=bindCategory(request);
            product.setCategory(category);
            //call the validation to process the action saveAndMerge
            productService.saveAndMerge(product, category);
            //Handle the user friendly message
            DialogKind kind = DialogKind.SuccessDialog;
            request.setAttribute("msg", "SucessDialogMessage");
            request.setAttribute("kind", kind);
            request.setAttribute("title", "SucessDialogTitle");
            //In success, show the GUI that contains <<FormList>>
            return showListAllProductsView(request, response);
        } catch (FieldMsgValidationException ex1){
            doProcessUserFriendlyMessage(request,ex1);
        } catch (ValidationException ex2){

```

Figure 25: Generated source code for the *Controller* layer implemented with Springframework (2.5).

The best-case scenario for mobile is also supported. Thus, although the information about the flow layout is lost in the second model, this is a constraint from the Mobile platform, not a limitation in the MockupToME Method. For example, for richer GUI components that can run in other mobile devices, it is possible to include in the model transformation lifecycle another package for Mobile DSL. This package allows the designer to represent GUI components mapped for the CDC profile, which allows the representation of GUIs programmed with Java AWT. Likewise, for desktop platform we include the Desktop DSL, which is mapped for source code developed with Java Swing. For CDC platforms, a transformation from MockupToME DSL to Mobile DSL will not imply in lost of layout information.

For the design of Mobile GUIs, we prefer the use of Matisse Designer⁵, as shown in Figure 27 (4), instead of the EMF editor shown in Figure 27 (2). This means that, differently from the other DSLs included in our lifecycle, the refinement of a GUI for mobile is performed with an external tool. Because Matisse exports and imports the design

⁵Matisse Designer -
<https://netbeans.org/community/magazine/html/03/matisse/>

A) Content of the Master "Product" in JSP Source Code

```

<%
UsuarioDTO userDTO =(UsuarioDTO) session.getAttribute("user");
LocalUserService localUserService = LocalUserService.getInstance();
%>
<% if("null".equals(request.getSession().getAttribute("login"))
|| null == request.getSession().getAttribute("login")){ %>
<script>
    jqueryOpen('showLoginInformationForm.html','general');
</script>
<% } %>
<%@page import="entities.Product"%>
<% Product product = (Product) request.getAttribute("product"); %>
<% if(product == null) product = new Product(); %>
<%@page import="entities.Category"%>
<% Category category = (Category)request.getAttribute("category"); %>
<form class="default_form" method="post" id="productForm">
    <input name="product.id" id="product.id" type="hidden"
        value="<jstl:out value='${product.id}' />" />
    <input name="product.name" id="product.name"
        value="<jstl:out value='${product.name}' />" />

```

B) Content of the Strategy Find and Attach in Association with the Detail "Category"

```

<div id="findPanel">
    <span class="ui-ti-text"><binder:message code="Category"/></span>
    <input name="product.category.id" id="product.category.id"
        type="hidden"
        value="<jstl:out value='${product.category.id}' />" />
    <ul> <li>
        <%if(product!=null && product.getCategory()!=null
        && product.getCategory().getId()!=null
        && product.getCategory().getName()!=null){ %>
        <label for="category.find">Find:</label>
        <input type="text" id="category.find" name="category.find"
            value="<jstl:out value='${product.category.name}' />" />
        <% } %>
        <button onClick="jquerydoPost('productForm',
            'findCategoryAction.html?product.id=<%=product.getId() %>',
            'content'); return false;" >
        <span class="ui-button-text">
            
        </span>
    </li>

```

Figure 26: Generated source code for the *View* layer in JSP.

in XML, this external tool is integrated with our supporting tool through operations of type import/export. This means that the model 2 is transformed for the XML in conformity with the Matisse Designer, resulting in model 2'. As illustrates the piece of source code in Figure 27 (3), we also developed a model-based operation of type text-to-model that reverses data from XML (model 2') to the representation in model 2, which is in conformity with Mobile DSL.

The limitation in user interactions from the CLDC profile have no effect the model elements represented on the web server. However, as illustrated in Figure 20, for establishing the connection of the mobile device with the business logic available on the server side, it is needed to use an API that deals with limited remote connections in the client-side of the application. The design and implementation of such connection are discussed in the next subsection.

7.4. Remote Connection

As illustrates the component diagram in Figure 20, devices on the client-side are connected with the business logic available on the server-side through remote connections. Likewise, any DSL added for the *View* layer, i.e., which will not executes inside the web server, demands a

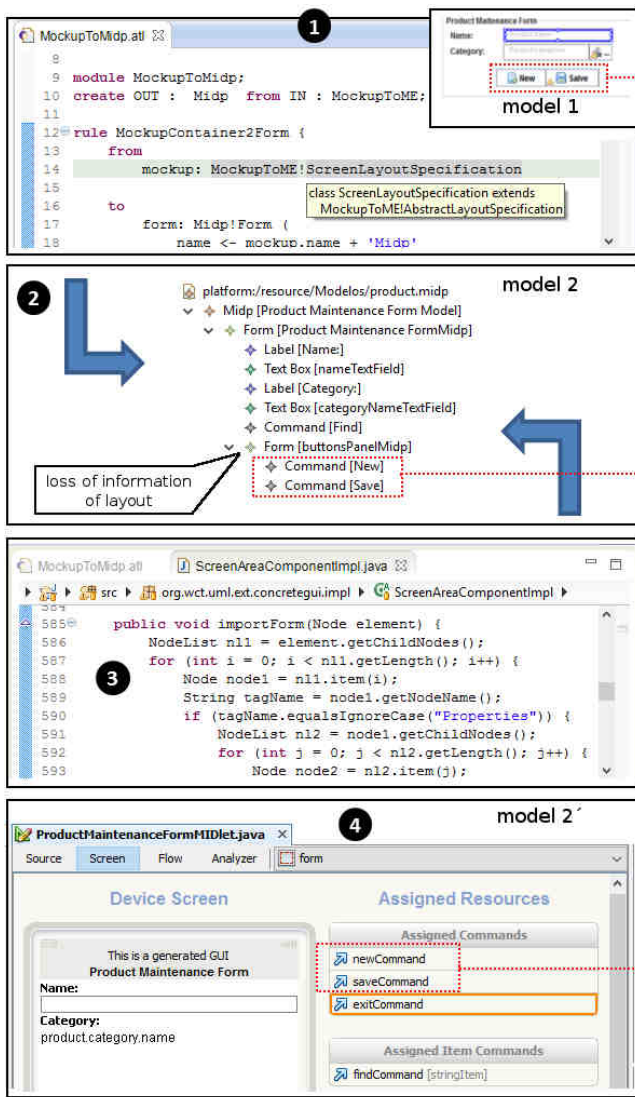


Figure 27: Generated models for the View layer on a mobile device dependent from the CLDC platform: the source code in (1) allows the generation of a model conforms to *Mobile DSL* shown in (2) and; the source code in (3) allows to import/export such model for the XML file associated with the Matisse (Mobile Designer) shown in (4).

new layer in the MVC structure to handle the remote connection between the device and the web server. This allows that the whole source code for application logic remains isolated on the web server, a good approach for modularity and maintenance of source code [20].

As illustrated in the top-part of Figure 28, a class named *RemoteProductService* is mapped for the *Remote* layer, thus a piece of a multi-layered MVC structure. This new class is generated from the representation of the *ProductService* interface. It holds semantics for connection in conformity with annotations from the EDOC UML Profile, such as «EJBImplementation» and «EJBRemoteMethod». Such specification is transformed into the source code illustrated in Figure 28 (2). The class *RemoteProductService*

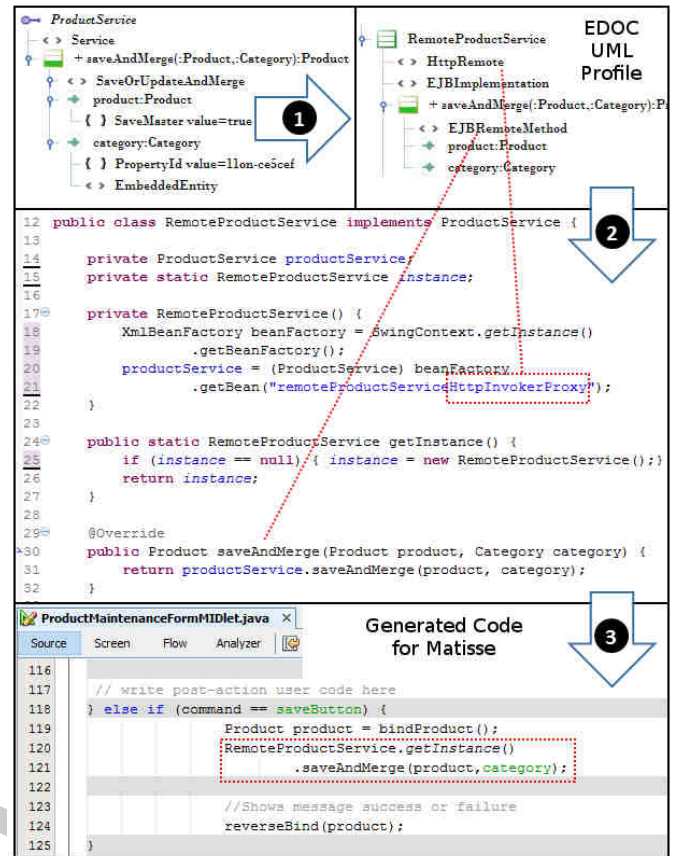


Figure 28: Generated source code for the Remote layer in HTTP Remote.

vice is also considered for the generation of the source code shown in Figure 28 (3), which is used by the Matisse plug-in for simulation of GUIs for mobile devices.

7.5. Final Remarks

The example shown in Figure 27 illustrates the flexibility promoted by a multi-layered architecture. In case the designer needs to include a representation for an external mobile GUI, such as a DSL mapped to Android SDK⁶, it would be enough to: 1) develop a model-to-model transformation from *model 1* in conformity with *MockupToME DSL* into a *model 2* in conformity with the hypothetical *Android DSL*; and 2) develop a model-to-code transformation from *model 2* to the underlying implementation associated with this API.

Each inclusion of a DSL in the lifecycle of model transformation implies in a set of new models and refinements. This is because *MockupToME DSL* is defined in a high-level of abstraction than these platform specific DSLs for GUI. The inclusion of the hypothetical *Android DSL* would not imply in change for the *Evolutionary Prototyping Phase*. However, it would imply in inclusion of such new DSL into the *Architectural Prototyping Phase*. For example, in this

⁶Android SDK - <<http://developer.android.com>>

phase the use of CDC requires a different package from the Mobile DSL and also a different model-to-model transformation in the lifecycle illustrated in Figure 27.

Through the FOMDA Approach [34] we add flexibility for the methodology in the implementation level. Although we consider that this approach for MDE as Service is not easy neither cheap, it is very flexible to include new DSLs and model transformations as requested by software factories. Thus, it is possible to evolve the presented methodology in terms of new DSLs, new MVC layers, underlying implementation frameworks and APIs. The generation of source code, strictly from what is designed, is possible due to the development of some DSLs and the integration of several concepts considered in the literature of the area. Other DSLs are not included in our lifecycle for model transformations and methodology, which means that the reader should consider this as a limitation of our proposal. Despite this limitation, we provided an interesting set of tools in support for automated design of web information systems.

8. After Source Code Generation

This section describes activities recommended to execute after the functional prototyping phase.

8.1. Round-trip Engineering

Full source code generation is achieved in our experiences. By full we mean from the perspective of what is designed, not the overall application. Thus, the full generation is for few use case patterns. This practice have a drawback: for non generated functionalities, which are programmed without the use of model transformations, round-trip engineering can be necessary. This would imply in an overhead to synchronize source code and models. For example, when functionalities developed without MockupToME require the developers to change manually an already generated source code. Round-trip engineering is necessary to ensure that re-generated source code is correct.

To exemplify how this issue is tackled in our approach, consider that, after the source code generation discussed previously, the use case **Generate Billet** has to be manually developed. We acknowledge that such use case is possible to be abstracted in a model, demanding only an increment in a DSL discussed previously. However, assume that this is not the case and the developer must develop it manually.

In the worst-case scenario, the implementation of the controller layer follows as is illustrated in Figure 29. It is composed of the following other implementations: 1) assume that the developer has added the operation **generateBilletAction** inside the previously generated class shown in Figure 25, representing the controller layer; 2) line 152 shows a call for the DAO layer illustrated in Figure 24, which contains a manually implemented operation

to list products from a web shop kart; 3) line 167 shows an operation that generates the PDF file with information for payment, also developed manually inside the controller.

In this case, two previously generated classes were changed manually, requiring the execution of a manual round-trip engineering. As consequence, the developer or designer needs to update the model elements (5) and (7) shown in Figure 17. They need to specify manually one operation in each model element with a tag *BodyCode*, whose internal source code is represented as a string. This is an issue when developers or designers are inexperienced. Thus, whenever possible, this reverse and manual round-trip engineering should be avoided.

Our recommendation to mitigate the need for reverse manual round-trip is simple and also well-known in the literature [32, 11]. Developers should not develop new features inside the generated source code, thus developing new classes and, preferably, locate it in a separate package. Instead of adopting an approach that leads to the worst-case scenario, we recommend that the developers: 1) create a new package; 2) manually develop another class for controller, e.g., **ManualCodeMultiActionProductController**; and, 3) manually develop another class for DAO, e.g., **ManualCodeProductDAOHibernate**.

These recommendations will keep isolated the generated classes from the manually coded ones, reducing the chances for the execution of manual round-trip engineering from code to model. The generation of source code must obey the same rules. Of course, there are always exceptions to these rules. In our experiences, we observed that entities, in the *Model* layer, are the unique source codes where conflicts between manual and generated source code occurs, independently from the aforementioned recommendation. This is because entities are the centralizer source code in a DDD approach. While other layers accept the development of several classes, the *Model* layer is more rigid. For example, we can develop two classes for the DAO layer, namely **ProductDAOHibernate** and **ManualCodeProductDAOHibernate**, but they both refer a unique entity class **Product**.

Changes in entities require round-trip engineering. However, this is not a big deal. We are not giving too much credit in regard to process overhead when it is necessary to apply specific changes in entity classes, e.g., into the model element shown in the left side of Figure 22. That is because the wizard illustrated in the right side of Figure 22 helps in the execution of these manual round-trips. Moreover, as illustrates Figure 30, we also developed a feature for automatically reverse Java source code to model. This feature is part of our tool support integrated with the Java platform. It is connected with adaptive test cases and model transformations, allowing the execution of operations of type code-to-model [45].

It is important to mention that our tool support for automatic reverse round-trip is limited and it is not applicable to the View layer (JSP source code). For the worst-case scenario, whose changes are not supported by

For those frequent changes observed along iterations, another possibility to avoid manual round-trip is to introduce them into model transformations. Likewise, our tool allows extensions in model transformation components, made on the fly, through specialization points [44]. Preferable, these extensions should be added before the beginning of software project, when these components are adapted in the pre-game phase [36]. However, they can also be introduced along the execution of a software project. To reach benefits and drawbacks that this approach introduces for a software project, a future work will discuss how a team received increments in components for source code generation along the execution of iterations.

It is also good to remember that a version control system helps developers to compare versions of the generated source code. Developers trace overwritten artefacts in a new source code generation (forward round-trip), making punctual manual adjustments in source code when needed. Artefact that is not fully generated implies on a big effort for developers to apply adjustments. We are able to generate full source code, which mean that, when source code generators are calibrated and without errors, developers do not spent a big effort in making adjustments. Therefore, even considering the worst-case scenario, developers are capable to make punctual adjustments in source code, which is also not considered in our experiences as a big issue that hampers the execution of iterations.

From the generation of functional prototypes, acceptance tests are conducted in iteration cycles following the selected reference model for software development process. Thus, it is important to test in a web browser or in a mobile emulator, together with the client, each use case scenario developed or not with the assistance of our tool support.

For a general guidance on the execution of acceptance tests, we found very interesting the Acceptance Test-Driven Development (ATDD) [46]. It includes some practices for the execution of acceptance test cases, which can be performed manually or automatically with the framework JBehave⁷. After the development of the new use cases, automated test cases in JBehave can quickly detect whether functionalities, developed in previous iterations, fails in the new iteration due to the introduction of new source code. For this reason, acceptance tests are complementary to the

⁷JBehave - <<http://jbehave.org/>>

```

143 @RequestMapping("/generateBilletAction.html")
144 public ModelAndView generateBilletAction(
145     HttpServletRequest request,
146     HttpServletResponse response) {
147     try {
148         JBoletoBean jBoletoBean = new JBoletoBean();
149         ShoppingKart sk = new ShoppingKart();
150         sk.setId(request.getParameter("id_shoppingkart"));
151
152         List<Product> products = productService
153             .listProductsByShoppingKartId(sk);
154
155         Vector<String> items = new Vector<String>();
156         float total = 0.0f;
157         for (Product prod : products) {
158             String item = "Item:" + prod.getName() + "-"
159                 + prod.getCategory().getName() + " R$ "
160                 + prod.getValue();
161             items.add(item);
162             total += prod.getValue();
163         }
164         jBoletoBean.setDescricaoes(items);
165         jBoletoBean.setValorBoleto(total);
166         jBoletoBean.setDataVencimento(NEXT_MONTH);
167         return generatePDF(jBoletoBean);

```

Figure 29: Manual implementation of **Generate Billet** in the controller layer.

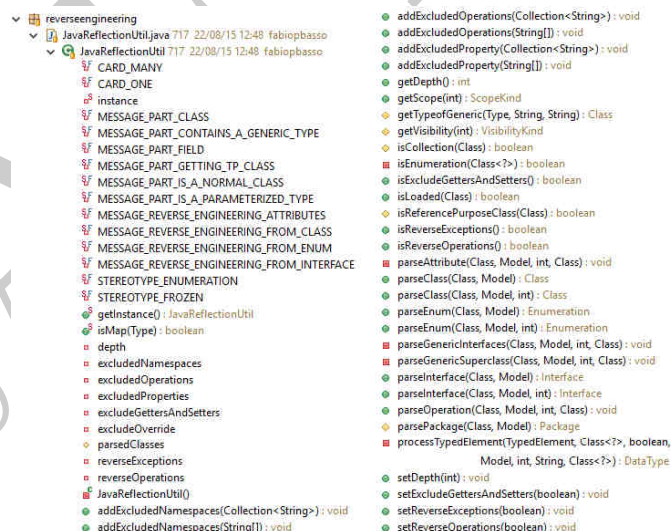


Figure 30: The class developed for automatic reverse engineering.

tests/validations with clients performed in the Evolutionary and Architectural Prototyping Phases, which consider only features developed in the current iteration.

We have no clear position about whether these tests should be developed in conditions of worst-case scenarios, when requirements changes with many frequency such as in start-ups [13].

8.3. Final Remarks

Worst-case scenarios, such as those found in start-ups, need the execution of iterations considering features for innovation [13]. Authors state that this can imply in requirements that change very fast. This is an issue when performing time-scales planned for one month or more [11]. Thus, other authors suggested the execution of tasks for discovery and invention [42], which is a characteristic from

rapid application prototyping few understood in research and practice of MDWE.

For these reasons, we recommend the execution of Tasks C-E in the MockupToME Method. In our approach, designers are free to explore alternatives for implementation of one or more use cases/user stories. We believe that this possibility influences positively the use of activities performed after the source code generation. In this point, we have some lessons and open questions, as discussed in the next section.

9. Experience Report

This section reports on an industrial innovation effort developed in collaboration with the Brazilian start-up company Adapit. Five applications were developed using the automated design approach for MDWE (integrally or partially) to the following domains: agribusiness management, online auction, trainee management, quality management, and financial management. We selected two software projects, presenting a summary about the application of these techniques in each one. Table 1 presents the team configuration associated with the design and source code generation tasks, where “SPⁱ is a software project for *i* in 1-2”:

SP¹ - ERP and CRM for Online Auction. This is a web/desktop application to apply online auction with support for Enterprise Resource Planning (ERP) and Customer Relationship Management (CRM). It was developed between 2007 and 2008 by Adapit using AMDA as framework for software process [47]. The team configuration that was allocated to this project is shown in Table 1 and includes a developer and a designer. SP¹ was conducted only with the Architectural Prototyping and Functional Prototyping phases because at the time we had not developed the MockupToME nor tasks associated with Evolutionary Prototyping Phase.

SP² - ERP for Financial Management. It is a web application to manage financial support for innovation projects. The latter application has been developed between 2010 and 2011 by Company A. This project was supervised by the Adapit’s team. As shown in Table 1, to perform the activities discussed previously, Company A allocated in SP² a team with low design and development experience. The team in SP² adopted integrally the tasks and tool support discussed in this article.

In the following we discuss: 1) the experience that justifies the advent of MockupToME Method and tool support; 2) discrepancies of these software projects that suggest improvements from our current approach in comparison to our previous initiative; 3) lessons learnt from these projects; and, 4) open questions derived from these experiences.

9.1. Justification

In 2007, the development of wizards in support to MDWE was part of services added in a business plan proposed

by Adapit, incubated at RAIAR-TECNOPUC-Brazil between 2007 and 2011. The execution of SP¹ was far to be considered as productive, leading to the conclusion that this business plan failed due to difficulties to execute our first approach for MDWE in start-up contexts. For example, in SP¹ we observed issues associated with round-trip engineering, which led to some good practices discussed previously. Our worst-case scenario in SP¹ occurred when we performed an iteration lasting two months. After five weeks, the client changed his idea about the requirement in the first cycle of validation. This required the re-execution of the phases Architectural Prototyping and Functional Prototyping, resulting in changes in source code and model. Because we had no tool support for reverse engineering, this experience in SP¹ suggested that round-trip engineering should be executed manually. It was executed before restart the Architectural Prototyping phase, re-generating source code in Functional Prototyping phase and making manual adjustments in source code.

We concluded that manual design of MVC-based application models is very tiring and expensive to the point that, in 2008, Adapit considered the possibility to leave the MDWE approach. We agreed that MDWE was not productive for the company context: start-up and small company, with few money and new in the market. However, it was decided to give for MDWE one more chance. Likewise, issues observed in SP¹ led to the development of the MockupToME Method. This allowed professionals from Adapit to adopt a new perspective for implementation of MDE as Service based on automated design.

From the point of view of research and practice, these experiences allowed a better understanding of contexts of start-ups and issues for the MDE adoption. To improve our design practices for the next software projects, we looked for prototyping tools used in agile methods. We concluded that designers should work in a high-level of abstraction than MVC-based application models. More importantly, in order to reduce risks of producing wrong features, the method should also consider design tasks for discovery and invention (tasks C and D). Thus, these are the justifications for the introduction of the Evolutionary Prototyping phase in our methodology for MDWE.

Experiences such as the one in SP¹ provided the reasons why we included many interactions with clients in the process. For the worst-case scenarios that present uncertainty in requirements, besides the acceptance tests after the Functional Prototyping phase, we introduced in MockupToME Method two validations with clients that are associated with design tasks. In our position, it is a common mistake to assume that interactions with clients will ever “delay something” in the software development. In fact, the opposite was observed in practice, with books suggesting that frequent validations with clients is good for shortening time-scales in worst-case scenarios [48, 49, 25]. Besides, frequent validations reduce the risks of producing wrong features and, in consequence, reducing rework in iteration cycles and also among iterations. Thus, consid-

Table 1: Attributes of the teams used in each software project

Attributes of the team used in SP ¹							
Num.	Stakeholder	Experience	Education Level	Exp. in UML	Exp. in MDE	Exp. in J2EE	Exp. in MVC
1	Designer	Senior	Master Degree	Advanced	Advanced	Basic	Advanced
1	Programmer	Senior	Master Degree	Advanced	Advanced	Advanced	Advanced

Attributes of the team used in SP ²							
Num.	Stakeholder	Experience	Education Level	Exp. in UML	Exp. in MDE	Exp. in J2EE	Exp. in MVC
1	Designer	Trainee	Graduate	Basic	None	Basic	Basic
1	Programmer	Trainee	Undergraduate	Basic	None	Basic	Basic

Table 2: MVC-based layers used in each software project

Application layers	SP ¹		SP ²	
Entities and enumerations	64	13.44%	50	25.25%
Validation on the server side	20	4.20%	35	17.68%
Web controllers	11	2.31%	22	11.11%
Data Access Object (DAO)	16	3.36%	35	17.68%
JSP [web view layer]	190	39.91%	56	28.28%
Java Swing [forms/tables]	112	23.53%	0	0%
Java Swing [window/dialog]	41	8.61%	0	0%
Remote layer	22	4.62%	0	0%

Lines of code (LOC)	SP ¹		SP ²	
Entities and enumerations	4.947	4.38%	5.477	14.95%
Validation on the server side	2.919	2.58%	4.152	11.33%
Web controllers	6.283	5.56%	11.652	31.81%
Data Access Object (DAO)	11.310	10.02%	5.441	14.85%
JSP [web view layer]	17.249	15.28%	7.266	19.83%
Java Swing [forms/tables]	60.876	53.92%	0	0%
Java Swing [window/dialog]	6.524	5.78%	0	0%
Remote Layer	2.781	2.46%	0	0%

Table 3: Data from application in software projects

Where Automated Design Helped?	SP ¹	SP ²
Total weeks to conclude each software project	58	44
Average of weeks that MDWE was used	22	20
Best performance for design	27 hours	8 hours
Average of time-scales in iterations	>= 4 weeks	1-2 weeks
Generated source code	64%	82%

ering worst-case scenarios that we have experienced, our methodology was also conceived to allow client interaction in three phases of prototyping, each one aiming at reducing the risk of producing wrong features for the next.

9.2. Discrepancies in Software Projects

These software projects present similar MVC layers, as illustrated by the data in Table 2. Table 3 shows some statistical data about each software project. SP¹ is a little bit more complex than SP² due to the development of some more complex use cases, such as **Generate bill-let**, not supported by source code generators. Besides, Table 2 suggests that SP¹ is more complex due to the following reasons: 1) it is larger and includes the support for CRM besides functionalities for ERP that contextualizes the type of system in SP²; 2) SP¹ includes a second DSL for the View layer, the Desktop DSL that is implemented in Java Swing, besides JSP that implements the Web DSL used also in SP²; 3) SP¹ owns many Lines-Of-Code (LOC) associated with the Desktop view and less source code for Controller and JSP from the Web view than in SP²; 4) SP¹

includes source code for the Remote layer, not included in SP²; and, 5) In SP¹, the MVC-based architectural models were designed mostly manually with the help of wizards and in SP² these models were automatically generated after the execution of the Evolutionary Prototyping Phase.

Table 3 also shows that MDWE was used in 22 weeks for SP¹, while it was used in 20 weeks for SP². This only means that MDWE is used in less than a half of the time of the overall software projects that consumed a total of 57 weeks in SP¹ and 44 in SP². Although not comparable due to differences in underlying implementation technologies and processes, they have the following similarities: 1) they were conducted with MDWE, allowing the generation of many functionalities of type CRUD, and 2) they used the Architectural Prototyping and Functional Prototyping phases, with few differences in source code generators [34].

We acknowledge that we cannot compare these two software projects. However, as suggests the data shown in Table 3, these software projects presented different time-scales adopted in each one when compared with the team skills shown in Table 1. In this regard, discrepancies between time-scales are clear. Company A successfully executed SP² with iterations planned for one to two weeks, with the best performance for modelling reported as eight hours in the last iterations, i.e., after a learning curve period [36]. With our first approach for MDWE our best performance for design was 27 hours. It demanded in SP¹ an experienced designer and developer, while Company A used only non experienced stakeholders. Based on such information, one could expect that, in SP², the MDWE approach would present a worst performance than in SP¹. However, the opposite was observed. Other discrepancy is in regard to the activities performed after the source code generation. Company A did not report issues associated with round-trip engineering. These are benefits/effects that we have not a clear understanding about the causes, as discussed in the next subsection.

9.3. Lessons Learnt

Round-trip engineering is still a challenge in regard to tool support [31]. However, from our newest experience, we confirm that it is not a big issue, as suggested by Hutchinson et al. [50]. We have learned that a multi-layered architecture associated with the good practice of separating what is generated from manual coding mitigates

this overhead. Kelly and Tolvanen [32] make these recommendations too. Besides, based on an industrial survey, Whittle et al. [11] agrees in this respect. They have not considered this as an “Achilles heel” for the MDE adoption. Thus, through the assimilation of good practices for the development of manual code, Company A did not consider the round-trip engineering a big issue for the execution of our methodology.

Another important good practice is discussed in the literature by Kelly and Tolvanen [32]: generate 100% of the overall application is difficult, if not impossible; instead, teams should focus on full source code generation, i.e., generate 100% of what is designed. They suggest that lifecycles for model transformations will always present a delimited scope of DSLs and a delimited scope for source code generation. These limitations are not considered as reasons for a non adoption, which means that software factories can benefit from MDE without the generation of 100% of final application [11].

These experiences allowed us to observe some benefits promoted by this methodology as follows.

1. To reduce the risks of producing wrong features between iterations, Schwaber [42] suggests to acquire feedback about what is being produced in cycles of validation. Thus, short time-scales for iterations are preferred to quickly get feedback from clients, as the ones allowed in our approach.
2. A rich set of CRUD templates to generate diverse GUI structures, besides allowing non-experienced modellers to be included in MDWE-based processes, also allows the design of annotated mockups with action semantics that, for some use case patterns, allowed producing working pieces of software that did not required adjustments in source code.
3. Mockups are helpful to get feedback from clients of requirements in the Evolutionary Design phase and, similarly as Rivero et al. [12], we also noticed that clients feel more comfortable to opine about requirements when experimenting mockups than visualising UML diagrams representing MVC-based models.

Because our proposal requires the use of transformation templates to generate and refine mockups, there are some drawbacks as follows.

1. Model transformations can fail, meaning that the proposed methodology is only effective if transformation templates are perfectly working.
2. Client can request CRUD structures, or other use case scenarios, not yet developed as transformation templates.
 - (a) This would require a manual design of annotated mockups, implying in the development of the use case without the automated design techniques introduced in the Evolutionary Prototyping phase.
 - (b) This could also imply in issues for execution of MDWE, such as those observed in SP¹, instead of benefits observed in SP².

3. This methodology is only effective if enough transformation templates are available and if they meet the client needs. Otherwise, it became a manual design approach for MDWE, which we did not considered interesting for start-up contexts.

9.4. Open Questions

In a previous work we reported some issues and open questions to implement MDE as Service considering the pragmatism aspect of combination of MDWE and Scrum [36], summarized as follows: 1) The literature of the area lacks information on how to introduce MDE in specific contexts; 2) Some authors claim UML-based MDWE approaches are “counter agility”, but are they really?; 3) The “good” and “bad” on the combination of MDE and Agile should be associated with a context; 4) There is no requirement for “agile tools”; 5) There is no empirical information in the literature on incompatibilities between MDE and Agile Methods/Principles; and 6) Which are the suitable MDE techniques for dealing with round-trip?

The last open question is discussed in this article with the techniques that we considered interesting. In the following we complement the aforementioned work with research gaps for technical-level issues. For example, the execution of SP² presents some benefits not observed in SP¹ such as short time-scales and the mitigation of reverse engineering. For instance, we concluded that such benefits are associated with our methodology for automated design and tool support when executed integrally. However, the reasons for such benefits are not totally clear, thus raising the following open questions:

Is full source code generation the unique reason for mitigation of issues associated with reverse round-trip engineering in SP²? In our tool support, full source code generation allow to perform changes from model to code following an iterative and incremental process. This is possible only for specific types of use case patterns for web information systems: CRUD, List, Filter, and Report. Since the execution of SP² we concluded that, for this type of functionalities, changes performed along iterations would not require the execution of manual round-trip engineering, since they are changed in models and re-generated. Besides, Company A did not considered round-trip engineering as an issue. Currently, we are asking ourselves whether the full source code generation is the unique reason why round-trip engineering is not an issue.

Is our approach good for improve the quality, modularization, and maintenance of source code? Related works present such benefits as promoted by their approaches [51, 52, 41, 12]. Analysing the data shown in Table 2, we conclude that the introduction of tool support in Evolutionary Prototyping phase, adopted in SP², may have influenced the generation of more elements in the MVC layers than in SP¹, thus resulting in more modular and maintainable source code. Paradoxically, this would mean that the automated design techniques, introduced

on the top of our method, could lead inexperienced stakeholder to produce an application with more quality than the produced by the two first authors of this article, which are “experts”. This question needs further investigation.

Is the multi-layered architecture good to mitigate round-trip engineering? In our approach, developers commit changes quickly from models to the implementation without overriding the manual work made in previous iterations. Allier et al. [20] state that a design directed to the MVC-based architecture helps on the modularization and organization of the source code. The regeneration of source code includes as input model elements designed conforms to MVC-based application layers. Based on principles of modularity, we recommended that manual coding must be allocated in isolated modules from the generated source code. In this sense, this recommendation associated with a multi-layered design may be responsible for the non existence of big issues for round-trip in Company A. However, although not prepared with good practices discussed above, with the same multi-layered architecture we observed round-trip issues in SP¹. Thus, this is a paradox that must be investigated.

Is our approach good for requirement discovery and validation? One of the reasons for the development of a new approach for MDWE was our incapacity to perform validations of models in short time-scales in SP¹. Our clients feel comfortable to opine about requirements represented in paper prototypes, but they have many difficulties to understand and opine about the UML models. Besides, they wanted to click in buttons from real prototypes before provide a feedback of “100% sure” about validity of paper prototypes. We could not do this in SP¹. The Evolutionary Prototyping Phase was introduced to bridge the requirement engineering and the representation of models associated with MVC layers. In Adapit we observed this as a benefit for the requirement discovery and validation promoted by MockupToME Method. However, Company A reported that they have not experienced a case where requirements changed radically, as occurred with in SP¹. We consider observations made internally in Adapit few to answer the aforementioned question, mainly because there is a tendency to consider this important. Thus, an open question is whether and where tasks associated with discover and invention (C-E) help designers in this transition from the Requirement Engineering Phase to the Evolutionary Prototyping Phase in other software projects.

When developers should not automate acceptance test cases? This question is relevant because we consider that in worst-case scenarios the automation of acceptance test cases may add overhead to the iterations. Likewise, due to frequent changes on some requirements from the worst-case scenarios observed in SP¹, the development of automated acceptance test cases may be non effective. Anyway, assuming that requirements changed, that models must be changed, that the source code must be regenerated, acceptance tests need to be re-executed in a new cycle of acceptance. Our doubt is whether devel-

opers should automate the acceptance test cases for this cases. The automation would imply also on the redevelopment of the algorithm for behaviour and, as consequence, adding overhead for the execution of iterations in short time-scales. Thus, we are investigating whether these tests can also be generated.

10. Limitations

Limited to some use case patterns. This methodology and tool support are limited for use case patterns of type CRUD, List, Filter and Report. Examples of what we have not yet considered in the automated design includes: top-level layouts for web sites, features from HCI (rich menus, navigation, flows, responsive design), integration with web services, enterprise application integration, and others. Although our work is limited in this regard, several DSLs have been proposed in the literature to represent such abstractions. Thus, they may be included in this methodology conform requests.

No silver bullet. Although MDE is not new, i.e., an MDWE approach dates 2000 [53], putting it into practice remains a challenge. Mussbacher et al. [31] have pointed out issues that would be fixed only in the next thirty years from 2014. MDE can work on certain conditions and contexts [51, 52], such as for the contexts of the reported software projects. However, any MDE approach presents several “Achilles heel” that should be explored in research and practice [54, 55, 11, 31]. For example, this work is limited for some use case patterns supported by the presented automated design techniques, which means that it is ineffective for other types of use cases. Therefore, this work should never be considered as a silver bullet for software development, needing investigation of feasibility for each context.

11. Related Work

We present the related works with the methodology and tool support, considering three phases for prototyping: 1) **Evolutionary Prototyping**, which is classified as an approach for exploratory design; 2) **Architectural Prototyping**, which is classified as a modelling phase dedicated to represent models with more details and in conformity with layers of the MVC; and, 3) **Functional Prototyping**, which is characterized by the generation of full source code for all the layers of the adopted underlying architecture.

The evolutionary prototyping is dedicated to the design of mockups. Balsamic Mockups Company [30] provides a software tool to represent sketches, without the support for annotations that embed business logic. Blankenhorn [28], Vanderdonckt [5] and Kavaldjian [56] provide similar tools to support the design of mockups with UML Profiles, also without embedding the business logic into GUI components. WebML [53] and its commercial implementation

named WebRatio [41] also presents contributions for this phase, allowing the transformation from BPMN flows representing the business model of the application into GUI mockups represented with the WebML. Other DSLs are closer to the MockupToME DSL, such as those provided by Rivero et al. [12] and Forward et al. [29], which use annotations in mockups to represent the semantics for business logic. In this sense, Stary [57] suggests that transformations started from mockup are the key to improve client feedback in preliminary phases of a software process, since they verify acceptance of a given requirement using paper prototypes. Our differential is the introduction of techniques for automated design that speed-up the design of annotated mockups.

To visualise and modify intermediate specifications between mockups and executable prototypes for GUI, Molina et al. [58] propose an interesting tool namely CIAT-GUI that allows to test information system models in different abstraction layers of application. CIAT-GUI can also be classified as implementing these three phases of prototyping. The differences are that their approach uses a unique DSL while ours use many (e.g., MockupToME DSL, Web DSL, Desktop DSL, Mobile DSL). Although we have not yet tested other DSLs in our tool support than those discussed in this article, we hope that this feature will enable us to explore/include other possibilities for DSLs and design tools in isolated phases of prototyping. On the other hand, the use of a unique DSL simplifies the execution of the three phases of prototyping, connecting elements based on the same metamodel.

Our methodology also includes resources for model transformation to help designers in the transition from the evolutionary to the architectural prototyping phase. Rivero et al. [12] present a similar proposal to ours, since that annotated mockups are used as input to generate other application layers. The differences are: 1) we applied the generation of a mockup using start transformation templates, while these authors suggest to manually design mockups; 2) we included a richer support for the execution of automated design techniques; and, 3) we used mockups in the evolutionary phase to explore different possibilities of implementation, while the authors considered a static structure for mockups without options for selection.

Related with the architectural prototyping phase, some works proposes DSLs for the design of web information systems based on the MVC. Souza et al. [19] presents an approach for MDWE using UML interfaces very similar to those used in our methodology to represent the business logic. Nunes and Schwabe [6] propose the HyperDE, an environment to produce web information systems by specifying models and transforming them into functional prototypes, starting by a domain model. Similarly, Vara and Marcos [59] propose a framework composed of a set of model transformations that allows to develop information systems through DSLs. An experience report with the WebRatio [41] also presents positive results associated with the source code generation based on architectural models

manually specified: a small difference is that WebRatio uses as input a conceptual model representing the data-model for a database while we use a class diagram. Thus, as a small contribution to the practice, our methodology includes wizards that help the designer on the representation of details for MVC-based models.

All these works allows the generation of prototypes. However, only those that are classified as part of the architectural prototyping can also generate fully implemented prototypes.

Yulkeidi, Martinez, Rivero and Brambilla concluded that, in a comparison of MDWE with manual coding, a model-based process improves the productivity and software quality through modularization and maintenance of source code [51, 52, 12, 41]. We have not yet reached these benefits through our analytical studies, more related with the execution of approaches for MDE as Service than specificities of results from MDWE.

Finally, other type of proposal aims at starting prototyping with the specification of many web information systems details with textual DSLs. It is the case for Forward et al. [29], whose approach is similar to modern frameworks to develop web applications such as Ruby on Rails. These frameworks are used on development phase, not in the evolutionary prototyping. Our methodology is different from theirs since it implements three phases of prototyping based on MDWE, while Forward et al. [29] used a more direct approach for prototyping. To the best of our knowledge, there is no experimental evidences that suggests that the use of textual DSLs in preliminary software phases is a better solution to perform a requirement analysis than using architectural designs. Thus, this is also an open question that should be investigated in empirical studies.

Rossi [7] discusses on existing web DSLs, highlighting the importance of a new standard proposed by OMG to design web applications: the Interaction Flow Modelling Language (IFML). IFML standardises several of the representations included by the aforementioned DSLs. This language, as well as WebML and WebRatio, are complementary to MockupToME and overlaps some representations used in the UML Profiles from the Architectural Prototyping phase. A future work will explore this complementarity, presenting our profiles with appropriate comparisons with the state-of-art in MDWE.

Our contribution complements the literature of the area with an integrated approach by methodology and tool support for MDWE. In addition, the reported experiences suggest that the implemented automated design techniques can promote the introduction of MDWE in contexts that present issues for adoption. Thus, we present improvements in practices and tools with fully assisted design tasks for web information systems, which is only partially explored by related works.

12. Conclusions and Future Work

This article presents a new MDWE methodology to automate the design of multi-layered web information systems called MockupToME Method. Along the development of some web information systems, we noticed that, for the worst-case scenarios on the requirement engineering (i.e., in start-up contexts), paper prototypes themselves do not ensure the validity about requirements along software process iterations. These specifications change along the iterations, which makes difficult the execution of a MDWE approach. To deal with these chaotic scenarios, we concluded that short duration iterations should be adopted. However, the manual design of MVC-based application models hampers the execution of short time-scales. Thus, we proposed the automation of design tasks.

The MockupToME Method suggests the execution of design tasks and client evaluations about the designed models in three phases: Evolutionary Prototyping, Architectural Prototyping and Functional Prototyping. This execution includes the following features for rapid application prototyping that we consider as benefits for the state-of-practice in MDWE: 1) designers specify annotated mockups with semantics for actions in the Evolutionary Prototyping with the assistance of automated design techniques, supported by model transformations and refinements allowed in a mockup drawing tool; 2) the adoption of concepts such as Master/Detail, DDD, Multi-view, and other, allows the development of different templates for construction and refinement of models represented in different abstractions levels, thus allowing the use by non experienced designer; 3) these techniques are limited for use case patterns of type CRUD, List, Filter and Report; 4) for the worst-case scenarios regarding requirements uncertainty, client and designer interact in tasks for discovery and invention, e.g., while constructing and updating a model specification, they are allowed to visualise different implementation options for a use case to decide which of them fits best to the needs of the iteration; 5) the discovery and invention is considered as important for clients to reach more necessities, which is good in MDWE, allowing designers to quickly change designed models before execute the Architectural Prototyping and Functional Prototyping phases; and, 6) these features, added to other elements such as source code generation and practices discussed in this article, allowed for the execution of iterations lasting one week.

We summarised two industrial experiences in the development of web information system using our proposal in piece and integral. In the first experience, which adopted mostly a manual design approach, we observed many issues for execution of the software project including the long time invested in manual representation of models, issues in source code generation and bad practices for manual coding. Moreover, changes in requirements, motivated by misunderstanding or simply because the client decided to adopt other features for innovation, consumed too much

time from the overall software project. We concluded that MDWE issues associated with these changes such as round-trip engineering and rework in two levels of abstractions (models and code) could be related with the execution of iterations, planned and executed with more than one month. However, due to the incapacity in our tool support and practices adopted in 2007, we could not perform shorter iterations than a month.

The need for execution of shorter time-scales is the main reason for the development of the proposed methodology. Likewise, the most recent experience presented promising results promoted by our proposal, such as the possibility of execution of iterations lasting one to two weeks. The reasons for such a benefit are not totally clear for us. However, automated design techniques are clearly related. Other features that can be related include our recommendations for manual coding, client validations executed in three phases of prototyping, full source code generation, modularity promoted by a multi-layered MVC structure, the introduction of a phase for discovery and invention and the context of the developed system. Thus, we also addressed these features as open questions relevant for the theory and practice of MDWE.

To have a clear notion about the reasons why MockupToME Method is capable for execution of short duration sprints, we will conduct new works as follows:

- Conduct a study in retrospective considering projects executed with different approaches for MDWE. Accordingly, we will mine repositories from five software projects that used partially and integrally the tasks and tools associated with the MockupToME Method. We believe that, by mining these repositories, we can find answers for our open questions.
- Execute a second study for evaluation of the quality attribute “productivity” in agile teams. In a previous study that aimed at compare the productivity of two agile teams [35], one adopting our methodology and tool support and the other developing the software without MDWE, we could not reach strong conclusions. This is because the study presented confounding factors such as differences on the underlying implementation framework and lacks of quantitative data. Thus, a future work will apply this methodology in another agile context to measure this quality attribute.
- Highlight our technical contributions, presenting details of associated scripts for model transformations and metamodels. So far, our contributions discusses only aspects associated with the management and reuse of model transformation components [34]. Our long-term goal for future works is to discuss particularities from our metamodels and tool support, thus presenting some contributions for the state-of-art in MDWE.

References

- [1] S. Kent, Model Driven Engineering, in: *Integrated Formal Methods*, 286–298, 2002.
- [2] D. C. Schmidt, Guest Editor's Introduction: Model-Driven Engineering, *IEEE Computer* 39 (2) (2006) 25–31.
- [3] M. Voelter, Best Practices for DSLs and Model-Driven Development, *Journal of Object Technology* 8 (6) (2009) 79–102.
- [4] G. Booch, J. Rumbaugh, I. Jacobson, *The Unified Modeling Language User Guide* (2nd Edition), Addison-Wesley, 2005.
- [5] J. Vanderdonckt, A MDA-compliant environment for developing user interfaces of information systems, in: *Proceedings of the 17th international conference on Advanced Information Systems Engineering*, 16–31, 2005.
- [6] D. A. Nunes, D. Schwabe, Rapid prototyping of web applications combining domain specific languages and model driven design, in: *Proceedings of the 6th international conference on Web engineering*, 153–160, 2006.
- [7] G. Rossi, Web Modeling Languages Strike Back, *Internet Computing*, *IEEE* 17 (4) (2013) 4–6.
- [8] R. B. France, J. M. Bieman, Multi-View Software Evolution: A UML-based Framework for Evolving Object-Oriented Software, in: *ICSM*, 386–395, 2001.
- [9] V. Kulkarni, S. Barat, U. Ramteerthkar, Early experience with agile methodology in a model-driven approach, in: *14th International Conference on Model-Driven Engineering Languages and Systems, MODELS 2011*, 578–590, 2011.
- [10] Y. Zhang, S. Patel, Agile Model-Driven Development in Practice, *Software*, *IEEE* 28 (2) (2011) 84–91.
- [11] J. Whittle, J. Hutchinson, M. Rouncefield, H. Burden, R. Heldal, Industrial Adoption of Model-Driven Engineering: Are the Tools Really the Problem?, in: *Proceedings of the 16th International Conference on Model Driven Engineering Languages and Systems, MODELS'13*, 1–17, 2013.
- [12] J. M. Rivero, J. Grigera, G. Rossi, E. R. Luna, F. Montero, M. Gaedke, Mockup-Driven Development: Providing agile support for Model-Driven Web Engineering, *Information and Software Technology* 56 (6) (2014) 670–687.
- [13] C. Giardino, M. Unterkalmsteiner, N. Paternoster, T. Gorschek, P. Abrahamsson, What Do We Know about Software Development in Startups?, *Software*, *IEEE* 31 (5) (2014) 28–32.
- [14] P. F. Linington, Automating support for e-business contracts, *Int. J. Cooperative Inf. Syst.* 14 (2-3) (2005) 77–98.
- [15] D. Batory, E. Latimer, M. Azanza, Teaching Model Driven Engineering from a Relational Database Perspective, in: *Proceedings of the 16th International Conference on Model Driven Engineering Languages and Systems, MODELS'13*, 121–137, 2013.
- [16] E. Evans, *Domain-driven design: tackling complexity in the heart of software*, Addison Wesley, 2004.
- [17] P. J. Molina, S. Meliá, O. Pastor, JUST-UI: A User Interface Specification Model, in: *Computer-Aided Design of User Interfaces III*, 63–74, 2002.
- [18] F. P. Basso, R. M. Pillat, R. Z. Frantz, F. Rooz-Frantz, Assisted Tasks to Generate Pre-prototypes for Web Information Systems, in: *16th International Conference on Enterprise Information Systems*, *ICEIS'14*, 14–25, 2014.
- [19] V. E. S. Souza, R. D. A. Falbo, G. Guizzardi, A UML Profile for Modeling Framework-based Web Information Systems, in: *12th International Workshop on Exploring Modelling Methods in Systems Analysis and Design EMMSAD '2007*, 153–162, 2007.
- [20] S. Allier, O. Barais, B. Baudry, J. Bourcier, E. Daubert, F. Fleurey, M. Monperrus, S. Hui, M. Tricoire, Multitier Diversification in Web-Based Software Applications, *Software*, *IEEE* 32 (1) (2015) 83–90.
- [21] D. Parnas, Software Aging, in: *16th International Conference on Software Engineering, ICSE 16*, 279–287, 1994.
- [22] B. Burke, R. Monson-Haefel, *Enterprise JavaBeans 3.0: Developing Enterprise Java Components*, O'Reilly, 2006.
- [23] J. Bosch, Achieving Simplicity with the Three-Layer Product Model, *IEEE Computer* 46 (11) (2013) 34–39.
- [24] H. Han, B. Liu, Problems, solutions and new opportunities: using pagelet-based templates in development of flexible and extensible web applications, in: *Proceedings of the 12th iiWAS'10*, 679–682, 2010.
- [25] I. Sommerville, *Software Engineering* (9th Edition), Addison-Wesley, 2010.
- [26] E. Landre, H. Wesenberg, J. Olmheim, Agile enterprise software development using domain-driven design and test first, in: *Companion to the 22nd ACM SIGPLAN conference on Object-oriented programming systems and applications companion*, 983–993, 2007.
- [27] F. Davis, V. Venkatesh, Toward preprototype user acceptance testing of new information systems: implications for software project management, *IEEE Transactions on Engineering Management* 51 (1) (2004) 31–46.
- [28] K. Blankenhorn, A UML Profile for GUI Layout, Master's thesis, University of Applied Sciences Furtwangen. Department of Digital Media, URL <http://www.bitfolge.de/pubs/thesis/>, 2004.
- [29] A. Forward, O. Badreddin, T. Lethbridge, J. Solano, Model-driven rapid prototyping with Umple, *Software: Practice and Experience* 42 (7) (2012) 781–797.
- [30] Balsamic Mockups Company, Balsamiq Mockups Company, URL <https://balsamiq.com/products/mockups/>, 2015.
- [31] G. Mussbacher, D. Amyot, R. Breu, J.-M. Bruel, B. H. Cheng, P. Collet, B. Combemale, R. B. France, R. Heldal, J. Hill, J. Kienzle, M. Schöttle, F. Steimann, D. Stikkorum, J. Whittle, The Relevance of Model-Driven Engineering Thirty Years from Now, in: *Model-Driven Engineering Languages and Systems*, 183–200, 2014.
- [32] S. Kelly, J.-P. Tolvanen, *Domain Specific Modeling: Enabling Full Code Generation*, IEEE Computer Society - John Wiley & Sons, 2008.
- [33] N. B. Moe, T. Dingsoyr, T. Dyba, A teamwork model for understanding an agile team: A case study of a Scrum project, *Information and Software Technology* 52 (5) (2010) 480–491.
- [34] F. P. Basso, R. M. Pillat, T. C. Oliveira, L. B. Becker, Supporting Large Scale Model Transformation Reuse, in: *12th International Conference on Generative Programming: Concepts & Experiences*, *GPCE'13*, 169–178, 2013.
- [35] F. P. Basso, R. M. Pillat, F. Rooz-Frantz, R. Z. Frantz, Study on Combining Model-Driven Engineering and Scrum to Produce Web Information Systems, in: *16th International Conference on Enterprise Information Systems, ICEIS'14*, 137–144, 2014.
- [36] F. P. Basso, R. M. Pillat, F. Roos-Frantz, R. Z. Frantz, Combining MDE and Scrum on the Rapid Prototyping of Web Information Systems, *International Journal of Web Engineering and Technology* 10 (3) (2015) 214–244.
- [37] S. W. Ambler, A Roadmap for Agile MDA. Available at <<http://www.agilemodeling.com/essays/agileMDA.htm>>, Tech. Rep., Agile Modeling, 2015.
- [38] R. M. Pillat, T. C. Oliveira, P. S. Alencar, D. D. Cowan, BPMnT: A BPMN extension for specifying software process tailoring, *Information and Software Technology* 57 (0) (2015) 95 – 115.
- [39] F. Ricca, G. Scanniello, M. Torchiano, G. Reggio, E. Astesiano, On the effort of augmenting use cases with screen mockups: results from a preliminary empirical study, in: *Proceedings of the 2010 ACM-IEEE International Symposium on Empirical Software Engineering and Measurement*, 40:1–40:4, 2010.
- [40] EDOC, 2014, UML Profile For Enterprise Distributed Object Computing (EDOC), URL <http://www.omg.org/spec/EDOC/>, 2014.
- [41] M. Brambilla, P. Fraternali, Large-scale Model-Driven Engineering of web user interaction: The WebML and WebRatio experience, *Science of Computer Programming* 89, Part B (0) (2014) 71 – 87.
- [42] K. Schwaber, Scrum Development Process, in: *Workshop on Business Object Design and Implementation, OOPSLA'95*, 1–23, URL http://agilix.nl/resources/scrum_OOPSLA_95.pdf, 1995.

- [43] F. P. Basso, L. B. Becker, T. C. Oliveira, Uma Solução para Reuso e Manutenção de Transformadores de Modelos Usando a Abordagem FOMDA, in: *Simpósio Brasileiro de Engenharia de Software. Anais do 21o Simpósio Brasileiro de Engenharia de Software.*, SBES 2007, 130–146, 2007.
- [44] F. P. Basso, R. M. Pillat, T. C. Oliveira, M. D. D. Fabro, Generative Adaptation of Model Transformation Assets: Experiences, Lessons and Drawbacks, in: *29th Symposium On Applied Computing*, SAC'14, 1027–1034, 2014.
- [45] F. P. Basso, T. C. Oliveira, K. Farias, Extending JUnit 4 with Java Annotations and Reflection to Test Variant Model Transformation Assets, in: *29th Symposium On Applied Computing*, SAC'14, 1601–1608, 2014.
- [46] M. Gärtner, ATDD by Example: A Practical Guide to Acceptance Test-Driven Development, Addison-Wesley Signature Series (Beck) 1st Edition, 2012.
- [47] F. P. Basso, T. C. Oliveira, WorkCASE Toolkit: Uma Ferramenta de Suporte para Agile Model Driven Architecture, Tech. Rep., Adapit Soluções em TI, 2007.
- [48] K. Schwaber, *Agile Project Management with Scrum* (Microsoft Professional), Microsoft Press, 2004.
- [49] J. Shore, S. Warden, *The Art of Agile Development*, O'Reilly, 2008.
- [50] J. Hutchinson, J. Whittle, M. Rouncefield, S. Kristoffersen, Empirical assessment of MDE in industry, in: *Proceedings of the 33rd International Conference on Software Engineering*, 471–480, 2011.
- [51] Y. Martínez, C. Cachero, M. Matera, S. Abrahao, S. Luján, Impact of MDE Approaches on the Maintainability of Web Applications: An Experimental Evaluation, in: *Conceptual Modeling - ER 2011*, vol. 6998 of *Lecture Notes in Computer Science*, Springer Berlin Heidelberg, 233–246, 2011.
- [52] Y. Martínez, C. Cachero, S. Meliá, MDD vs. traditional software development: A practitioner's subjective perspective, *Information and Software Technology* 55 (2) (2013) 189 – 200, ISSN 0950-5849, special Section: Component-Based Software Engineering (CBSE), 2011.
- [53] M. Brambilla, P. Fraternali, M. Tisi, A Metamodel Transformation Framework for the Migration of WebML Models to MDA, in: *4th Int. Workshop on Model-Driven Web Engineering (MDWE 2008)*, CEUR-WS Proceedings, volume 389, Toulouse, France., 91–105, 2008.
- [54] M. Torchiano, F. Tomassetti, F. Ricca, A. Tiso, G. Reggio, Relevance, Benefits, and Problems of Software Modelling and Model Driven techniques-A Survey in the Italian Industry, *J. Syst. Softw.* 86 (8) (2013) 2110–2126, ISSN 0164-1212.
- [55] L. T. W. Agner, I. W. Soares, P. C. Stadzisz, J. M. Simao, A Brazilian Survey on UML and Model-driven Practices for Embedded Software Development, *J. Syst. Softw.* 86 (4).
- [56] S. Kavaljdian, A model-driven approach to generating user interfaces, in: *The 6th Joint Meeting on European software engineering conference and the ACM SIGSOFT symposium on the foundations of software engineering: companion papers*, 603–606, 2007.
- [57] C. Stary, Contextual prototyping of user interfaces, in: *Proceedings of the 3rd conference on Designing interactive systems: processes, practices, methods, and techniques*, 388–395, 2000.
- [58] A. I. Molina, W. J. Giraldo, J. Gallardo, M. A. Redondo, M. Ortega, G. García, CIAT-GUI: A MDE-compliant environment for developing Graphical User Interfaces of information systems, *Advances in Engineering Software* 52 (2012) 10 – 29.
- [59] J. M. Vara, E. Marcos, A framework for model-driven development of information systems: Technical decisions and lessons learned, *Journal of Systems and Software* 85 (10) (2012) 2368 – 2384.